


Heavy Equipment Operation

Best Management Practices for the Construction Industry



Best Management Practices for the

- Vehicle and equipment operators
- Site supervisors
- General contractors
- Home builders
- Developers

Doing the Job Right

Site Planning and Preventive Vehicle Maintenance

- Maintain all vehicles and heavy equipment. Inspect frequently for and repair leaks.
- Perform major maintenance, repair jobs, and vehicle and equipment washing off site where cleanup is easier.
- If you must drain and replace motor oil, radiator coolant, or other fluids on site, use drip pans or drop cloths to catch drips and spills. Collect all spent fluids, store in separate containers, and properly dispose as hazardous waste (recycle whenever possible).
- Do not use diesel oil to lubricate equipment parts, or clean equipment. Use only water for any onsite cleaning.
- Cover exposed fifth wheel hitches and other oily or greasy equipment during rain events.

Storm water Pollution from Heavy Equipment on Construction Sites

Poorly maintained vehicles and heavy equipment that leak fuel, oil, antifreeze or other fluids on the construction site are common sources of storm drain pollution. Prevent spills and leaks by isolating equipment from runoff channels, and by watching for leaks and other maintenance problems. Remove construction equipment from the site as soon as possible.

Spill Cleanup

- Clean up spills immediately when they happen.
- Never hose down "dirty" pavement or impervious surfaces where fluids have spilled. Use dry cleanup methods (absorbent materials, cat litter, and/or rags) whenever possible and properly dispose of absorbent materials.
- Sweep up spilled dry materials immediately. Never attempt to "wash them away" with water, or bury them.
- Use as little water as possible for dust control. Ensure water used doesn't leave silt or discharge to storm drains.
- Clean up spills on dirt areas by digging up and properly disposing of contaminated soil.
- Report significant spills to the appropriate local spill response agencies immediately.
- If the spill poses a significant hazard to human health and safety, property or the environment, you must also report it to the State Office of Emergency Services.

Roadwork and Paving

Best Management Practices for the Construction Industry



Best Management Practices for the

- Road crews
- Driveway/sidewalk/parking lot construction crews
- Seal coat contractors
- Operators of grading equipment, paving machines, dump trucks, concrete mixers
- Construction inspectors
- General contractors
- Home builders
- Developers

Doing The Job Right

General Business Practices

- Develop and implement erosion/sediment control plans for roadway embankments.
- Schedule excavation and grading work during dry weather.
- Check for and repair leaking equipment.
- Perform major equipment repairs at designated areas in your maintenance yard, where cleanup is easier. Avoid performing equipment repairs at construction sites.
- When refueling or when vehicle/equipment maintenance must be done on site, designate a location away from storm drains and creeks.
- Do not use diesel oil to lubricate equipment parts or clean equipment.
- Recycle used oil, concrete, broken asphalt, etc. whenever possible, or dispose of properly.

During Construction

- Avoid paving and seal coating in wet weather, or when rain is forecast, to prevent fresh materials from contacting stormwater runoff.
- Cover and seal catch basins and manholes when applying seal coat, slurry seal, fog seal, or similar materials.
- Protect drainage ways by using earth dikes, or other construction to divert or trap and filter runoff.

Storm Drain Pollution from Roadwork

Road paving, surfacing, and pavement removal happens right in the heart of the city and are numerous opportunities for asphalt, saw-cut slurry, or excavated material to illegally enter storm drains. Extra planning is required for these materials properly and guard against pollution of storm drains, creeks, and the Bay.

Never wash excess material from exposed aggregate concrete or similar treatments into a street or storm drain. Collect and recycle, or dispose to dirt area.

- Cover stockpiles (asphalt, sand, etc.) and other construction materials with plastic tarps. Protect from rainfall and prevent runoff with temporary rocks or plastic sheets and berms.
- Park paving machines over drip pans or absorbent material (cloth, rags, etc.) to catch drips when not in use.
- Clean up all spills and leaks using "dry" methods (with absorbent materials and/or rags), or dig up, remove, and properly dispose of contaminated soil.
- Collect and recycle or appropriately dispose of excess abrasive gravel or sand.
- Avoid over-application by water trucks for dust control.

Asphalt/Concrete Removal

- Avoid creating excess dust when breaking asphalt or concrete.
- After breaking up old pavement, be sure to remove all chunks and pieces. Make sure broken pavement does not come in contact with rainfall or runoff.
- When making saw cuts, use as little water as possible. Shovel or vacuum saw-cut slurry and remove from the site. Covers or protect storm drain inlets, and properly dispose of all residues.
- Sweep, never hose down streets to dry trapping and sand blasting may be used to sweep or vacuum truck. Do not dump vacuumed liquor in storm drains.

Fresh Concrete and Mortar Application

Best Management Practices for the Construction Industry



Best Management Practices for the

- Masons and bricklayers
- Sidewalk construction crews
- Patio construction workers
- Construction inspectors
- General contractors
- Home builders
- Developers
- Concrete delivery/pumping workers

Storm Drain Pollution from Fresh Concrete and Mortar Applications

Fresh concrete and cement-related mortars that wash into lakes, streams, or estuaries are toxic to fish and the aquatic environment. Disposing of these materials to the storm drains or creeks can block stormlines, cause serious problems, and is prohibited by law.

Landscaping, Gardening, and Pool Maintenance

Best Management Practices for the Construction Industry



Best Management Practices for the

- Landscapers
- Gardeners
- Swimming pool/spa service and repair workers
- General contractors
- Home builders
- Developers
- Homeowners

Doing The Right Job

General Business Practices

- Protect stockpiles and landscaping materials from wind and rain by storing them under tarps or secured plastic sheeting.
- Store pesticides, fertilizers, and other chemicals indoors or in a shed or storage cabinet.
- Schedule grading and excavation projects during dry weather.
- Use temporary check dams or ditches to divert runoff away from storm drains.
- Protect storm drains with sandbags or other sediment controls.
- Re-vegetation is an excellent form of erosion control for any site.

Landscaping/Garden Maintenance

- Use pesticides sparingly, according to instructions on the label. Rinse empty containers, and use rinse water as product. Dispose of rinsed, empty containers in the trash. Dispose of unused pesticides as hazardous waste.
- Collect lawn and garden clippings, pruning waste, and tree trimmings. Chip if necessary, and compost.
- In communities with pick-up of yard waste, place clippings and pruning waste in approved bags or containers. Or, take to a landfill that composts yard waste. No curbside pickup of yard waste is available for commercial properties.

Storm Drain Pollution From Landscaping and Swimming Pool Maintenance

Many landscaping activities expose soils and increase the likelihood that earth and garden chemicals will run off into the storm drains during irrigation or when it rains. Swimming pool water containing chlorine and copper-based algaecides should never be discharged to storm drains. These chemicals are toxic to aquatic life.

Do not blow or rake leaves, etc. into the street, or place yard waste in gutters or on dirt shoulders, unless you are piling them for recycling (allowed by San Jose and unincorporated County only). Sweep up any leaves, litter or residue in gutters or on street.

- In San Jose, leave yard waste for curbside recycling pickup in piles in the street, 18 inches from the curb and completely out of the flow line to any storm drain.

Pool/Fountain/Spa Maintenance

- When it's time to drain a pool, spa, or fountain, please be sure to call your local wastewater treatment plant before you start for further guidance on flow rate restrictions, backflow prevention, and handling special cleaning waste (such as acid wash). Discharge flows shall not exceed 100 gallon per minute.
- Never discharge pool or spa water to a street or storm drain; discharge to a sanitary sewer cleanout.
- If possible, when emptying a pool or spa, let chlorine dissipate for a few days and then recycle/reuse water by draining it gradually onto a landscaped area.
- Do not use copper-based algaecides. Control algae with chlorine or other alternatives, such as sodium bromide.

Filter Cleaning

- Never clean a filter in the street or near a storm drain. Rinse cartridge and diatomaceous earth filters onto a dirt area, and spool filter residue into a container. Dispose of spent diatomaceous earth in the garbage.
- If there is no suitable dirt area, call your local wastewater treatment plant for instructions on discharging filter backwash or rinse water to the sanitary sewer.

Painting and Application of Solvents and Adhesives

Best Management Practices for the Construction Industry



Best Management Practices for the

- Homeowners
- Painters
- Paperhangers
- Plasterers
- Graphic artists
- Dry wall crews
- Floor covering installers
- General contractors
- Home builders
- Developers

Doing The Job Right

Handling Paint Products

- Keep all liquid paint products and wastes away from the gutter, street, and storm drains. Liquid residues from paints, thinners, solvents, glues, and cleaning fluids are hazardous wastes and must be disposed of at a hazardous waste collection facility (contact your local stormwater program listed on the back of this brochure).
- When thoroughly dry, empty paint cans, used brushes, rags, and drop cloths may be disposed of as garbage in a sanitary landfill. Empty, dry paint cans also may be recycled as metal.
- Wash water from painted buildings constructed before 1978 can contain high amounts of lead, even if paint chips are not present. Before you begin stripping paint or cleaning pre-1978 building exteriors with water under high pressure, test paint for lead by taking paint scrapings to a local laboratory. See Yellow Pages for a state-certified laboratory.
- If there is a loose paint on the building, or if the paint tests positive for lead, block storm drains. Check with the wastewater treatment plant to determine whether you may discharge water to the sanitary sewer, or if you must send it offsite for disposal as hazardous waste.

Storm Drain Pollution from Paints, Solvents, and Adhesives

All paints, solvents, and adhesives contain chemicals that are harmful to wildlife in local creeks, San Francisco Bay, and the Pacific Ocean. Toxic chemicals may be found in liquid or solid products or from cleaning residues or rags. Paint material and wastes, adhesives and cleaning fluids should be recycled, reused, or disposed of properly to prevent these materials from flowing into storm drains and watercourses.

Painting Cleanup

- Never clean brushes or rinse paint containers into a street, gutter, storm drain, French drain, or stream.
- For water-based paints, paint out brushes to the extent possible, and rinse into a drain that goes to the sanitary sewer. Never pour paint down a storm drain.
- For oil-based paints, paint out brushes to the extent possible and clean with thinner or solvent in a proper container. Filter and reuse thinners and solvents. Dispose of excess liquids and residue as hazardous waste.

Paint Removal

- Paint chips and dust from non-hazardous dry stripping and sand blasting may be swept up or collected in plastic drop cloths and disposed of as trash.
- Chemical paint-stripping residues and chips and dust from marine paints or paints containing lead, mercury or tributyl tin must be disposed of as hazardous waste. Lead based paint removal requires a state-certified contractor.
- When stripping or cleaning building exteriors with high-pressure water, block storm drains. Direct wash water onto a dirt area and spade into soil. Or, check with the local wastewater treatment authority to find out if you can collect (pug or vacuum) building cleaning water and dispose to the sanitary sewer. Sampling of the water may be required to assist the wastewater treatment authority in making its decision.

Recycle/Reuse Leftover Paints

- Whenever possible:
 - Recycle or donate excess water-based (latex) paint, or return to supplier.
 - Reuse leftover oil-based paint. Dispose of non-recyclable thinners, sludge and unwanted paint, as hazardous waste.
 - Unopened cans of paint may be able to be returned to the paint vendor. Check with the vendor regarding its "buy-back" policy.



Los Altos Municipal Code Requirements

Los Altos Municipal Code Chapter 10.08.390 Non-storm water discharges

- A. Unlawful discharges. It shall be unlawful to discharge any domestic waste or industrial waste into storm drains, gutters, creeks, or San Francisco Bay. Unlawful discharges to storm drains shall include, but not be limited to, discharge from toilets; sinks; industrial processes; cooling systems; boilers; fabric cleaning; construction activities, including, but not limited to, painting, paving, concrete placement, saw cutting and grading; swimming pools; spas; and fountains, unless specifically permitted by a discharge permit or unless exempted pursuant to guidelines published by the superintendent.
- B. Threatened discharges. It shall be unlawful to cause hazardous materials, domestic waste, or industrial waste to be deposited in such a manner or location as to constitute a threatened discharge into storm drains, gutters, creeks or San Francisco Bay. A "threatened discharge" is a condition creating a substantial probability of harm, when the probability and potential extent of harm make it reasonably necessary to take immediate action to prevent, reduce or mitigate damages to persons, property or natural resources. Domestic or industrial wastes that are no longer contained in a pipe, tank or other container are considered to be threatened discharges unless they are actively being cleaned up.

Los Altos Municipal Code Section 10.08.430 Requirements for construction operations.

- A. A spill response plan for hazardous waste, hazardous materials and uncontained construction materials shall be prepared and available at the construction sites for all projects where the proposed construction site is equal to or greater than one acre of disturbed soil and for any other projects for which the city engineer determines it is necessary to protect surface waters. Preparation of the plan shall be in accordance with guidelines published by the city engineer.
- B. A storm water pollution prevention plan shall be prepared and available at the construction sites for all projects greater than one acre of disturbed soil and for any other projects for which the city engineer determines that a storm water management plan is necessary to protect surface waters. Preparation of the plan shall be in accordance with guidelines published by the city engineer.
- C. Prior approval shall be obtained from the city engineer or designee to discharge water pumped from construction sites to the storm drain. The city engineer or designee may require gravity settling and filtration upon a determination that either or both would improve the water quality of the discharge. Contaminated groundwater or water that exceeds state or federal requirements for discharge to navigable waters may not be discharged to the storm drain. Such water may be discharged to the sewer, provided that the requirements of Section 10.08.240 are met and the approval of the superintendent is obtained prior to discharge.
- D. No cleanup of construction debris from the streets shall result in the discharge of water to the storm drain system; nor shall any construction debris be deposited or allowed to be deposited in the storm drain system. (Prior code § 5-5.643)

Criminal and judicial penalties can be assessed for non-compliance.

General Construction And Site Supervision

Best Management Practices For Construction



Best Management Practices for the

- General contractors
- Site supervisors
- Inspectors
- Home builders
- Developers

Storm Drain Pollution from Construction Activities

Construction sites are common sources of storm water pollution. Materials and wastes that blow or wash into a storm drain, gutter, or street have a direct impact on local creeks and the Bay. As a contractor, or site supervisor, owner or operator of a site, you may be responsible for any environmental damage caused by your subcontractors or employees.

Doing The Job Right

General Principals

- Keep an orderly site and ensure good housekeeping practices are used.
- Maintain equipment properly.
- Cover materials when they are not in use.
- Keep materials away from streets, storm drains and drainage channels.
- Ensure dust control water doesn't leave site or discharge to storm drains.

Advance Planning To Prevent Pollution

- Schedule excavation and grading activities for dry weather periods. To reduce soil erosion, plant temporary vegetation or place other erosion controls before rain begins. Use the Erosion and Sediment Control Manual, available from the Regional Water Quality Control Board, as a reference.
- Control the amount of runoff crossing your site (especially during excavation) by using berms or temporary or permanent drainage ditches to divert water flow around the site. Reduce storm water runoff velocities by constructing temporary check dams or berms where appropriate.
- Train your employees and subcontractors. Make these best management practices available to everyone who works on the construction site. Inform subcontractors about the storm water requirements and their own responsibilities.

Good Housekeeping Practices

- Designate one area of the site for auto parking, vehicle refueling, and routine equipment maintenance. The designated area should be well away from streams or storm drain inlets, berms if necessary. Make major repairs off site.
- Keep materials out of the rain - prevent runoff contamination at the source. Cover exposed piles of soil or construction materials with plastic sheeting or temporary roofs. Before it rains, sweep and remove materials from surfaces that drain to storm drains, creeks, or channels.
- Keep pollutants off exposed surfaces. Place trashcans and recycling receptacles around the site to minimize litter.

Clean up leaks, drips and other spills immediately so they do not contaminate soil or groundwater or leave residue on paved surfaces. Use dry cleanup methods whenever possible. If you must use water, use just enough to keep the dust down.

- When refueling or vehicle/equipment maintenance must be done on site, designate a location away from storm drains.
- Do not use diesel oil to lubricate equipment parts, or clean equipment.

Practices During Construction


- Remove existing vegetation only when absolutely necessary. Plant temporary vegetation for erosion control on slopes or where construction is not immediately planned.
- Protect down slope drainage courses, streams, and storm drains with wattles, or temporary drainage swales. Use check dams or ditches to divert runoff around excavations. Refer to the Regional Water Quality Control Board's Erosion and Sediment Control Field Manual for proper erosion and sediment control measures.

Storm Drain Pollution from Earth-Moving Activities and Dewatering

Soil excavation and grading operations loosen large amounts of soil that can flow or blow into storm drains when handled improperly. Sediments in runoff can clog storm drains, smother aquatic life, and destroy habitats in creeks and the Bay. Effective erosion control practices reduce the amount of runoff crossing a site and slow the flow with check dams or roughened ground surfaces. Contaminated groundwater is a common problem in the Santa Clara Valley. Depending on soil types and site history, groundwater pumped from construction sites may be contaminated with toxics (such as oil or solvents) or laden with sediments. Any of these pollutants can harm wildlife in creeks or the Bay, or interfere with wastewater treatment plant operation. Discharging sediment-laden water from a dewatering site into any water of the state without treatment is prohibited.

Earth-Moving And Dewatering Activities

Best Management Practices for the Construction Industry



Best Management Practices for the

- Bulldozer, back hoe, and grading machine operators
- Dump truck drivers
- Site supervisors
- General contractors
- Home builders
- Developers

Doing The Job Right

General Business Practices

- Schedule excavation and grading work during dry weather.
- Perform major equipment repairs away from the job site.
- When refueling or vehicle/equipment maintenance must be done on site, designate a location away from storm drains.
- Do not use diesel oil to lubricate equipment parts, or clean equipment.

Practices During Construction

- Remove existing vegetation only when absolutely necessary. Plant temporary vegetation for erosion control on slopes or where construction is not immediately planned.
- Protect down slope drainage courses, streams, and storm drains with wattles, or temporary drainage swales. Use check dams or ditches to divert runoff around excavations. Refer to the Regional Water Quality Control Board's Erosion and Sediment Control Field Manual for proper erosion and sediment control measures.

Storm Drain Pollution from Earth-Moving Activities and Dewatering

Soil excavation and grading operations loosen large amounts of soil that can flow or blow into storm drains when handled improperly. Sediments in runoff can clog storm drains, smother aquatic life, and destroy habitats in creeks and the Bay. Effective erosion control practices reduce the amount of runoff crossing a site and slow the flow with check dams or roughened ground surfaces. Contaminated groundwater is a common problem in the Santa Clara Valley. Depending on soil types and site history, groundwater pumped from construction sites may be contaminated with toxics (such as oil or solvents) or laden with sediments. Any of these pollutants can harm wildlife in creeks or the Bay, or interfere with wastewater treatment plant operation. Discharging sediment-laden water from a dewatering site into any water of the state without treatment is prohibited.


Blueprint for a Clean Bay

Remember: The property owner and the contractor share ultimate responsibility for the activities that occur on a construction site. You may be held responsible for any environmental damage caused by your subcontractors or employees.

Best Management Practices for the Construction Industry



Santa Clara Urban Runoff Pollution Prevention Program

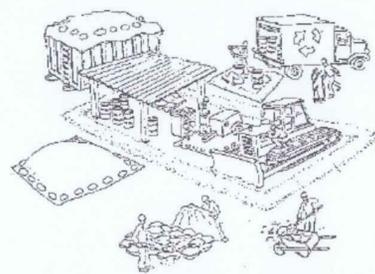

DESIGNED BY: LARRY LIND	APPROVED BY: 	CITY OF LOS ALTOS	DATE: OCTOBER, 2003
DRAWN BY: VICTOR CHEN	CITY ENGINEER	48056 R.C.E.	SCALE: N.T.S.
CHECKED BY: JIM GUSTAFSON	SHEET	OF SHEETS	DRAWING NO:

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
BLUEPRINT FOR A CLEAN BAY

08-21-14

T0.2



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
Info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 949-625-7869

Preventing Pollution: It's Up to Us

In the Santa Clara Valley, storm drains transport water directly to local creeks and San Francisco Bay without treatment. Storm water pollution is a serious problem for wildlife dependent on our waterways and for the people who live near polluted streams or bay lands. Some common sources of this pollution include spilled oil, fuel, and fluids from vehicles and heavy equipment; construction debris; sediment created by erosion; landscaping runoff containing pesticides or weed killers; and materials such as used motor oil, antifreeze, and paint products that people pour or spill into a street or storm drain.

Thirteen valley municipalities have joined together with Santa Clara County and the Santa Clara Valley Water District to educate local residents and businesses and fight storm water pollution. TO comply with this program, contractors most comply with the practices described in this drawing sheet.

Spill Response Agencies

DIAL 9-1-1
State Office of Emergency Services Warning Center (24 hours): 800-852-7550
Santa Clara County Environmental Health Services: (408) 299-6930

Local Pollution Control Agencies

County of Santa Clara Pollution Prevention Program: (408) 441-1195
County of Santa Clara Integrated Waste Management Program: (408) 441-1198
County of Santa Clara District Attorney Environmental Crimes Hotline: (408) 299-TIPS
Santa Clara County Recycling Hotline: 1-800-533-8414
Santa Clara Valley Water District: (408) 265-2600
Santa Clara Valley Water District Pollution Hotline: 1-888-510-5151
Regional Water Quality Control Board San Francisco Bay Region: (510) 622-2300
Palo Alto Regional Water Quality Control Plant: (650) 329-2598
Serving East Palo Alto Sanitary District, Los Altos, Los Altos Hills, Mountain View, Palo Alto, Stanford

City of Los Altos
Building Department: (650) 947-2752
Engineering Department: (650) 947-2780



NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

LEGEND

- PROPERTY LINE
- ▣ EXISTING BUILDING TO BE DEMOLISHED
- - - CURB DEMOLITION

NOTES:

- 1) ALL TREES TO BE REMOVED

DATE

REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9038 FAX: 650-925-7869

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
EXISTING SITE PLAN

08-21-14

A1.1

A ST. (40' R/W)

MIRAMONTE AVE.

FREMONT AVE. (60' R/W)

(E) BUILDING

(E) BUILDING
RIDGE

$R = 9.50'$
 $\Delta = 47^\circ 24' 41''$
 $L = 7.87'$

SIDEWALK EASEMENT

SIDEWALK EASEMENT

SIDEWALK EASEMENT

$R = 14.50'$
 $\Delta = 46^\circ 33' 27''$
 $L = 11.78'$

$R = 15.00'$
 $\Delta = 55^\circ 46' 34''$
 $L = 14.60'$

$R = 10.00'$
 $\Delta = 90^\circ 00' 00''$
 $L = 15.71'$

PG&E

PG&E

CB
TC 235.60
FL 234.93
INV 232.03

SSMH
RIM

CP
TEST



SCALE: 1/8"=1'-0"

1

EXISTING SITE PLAN




NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE	REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-949-7869

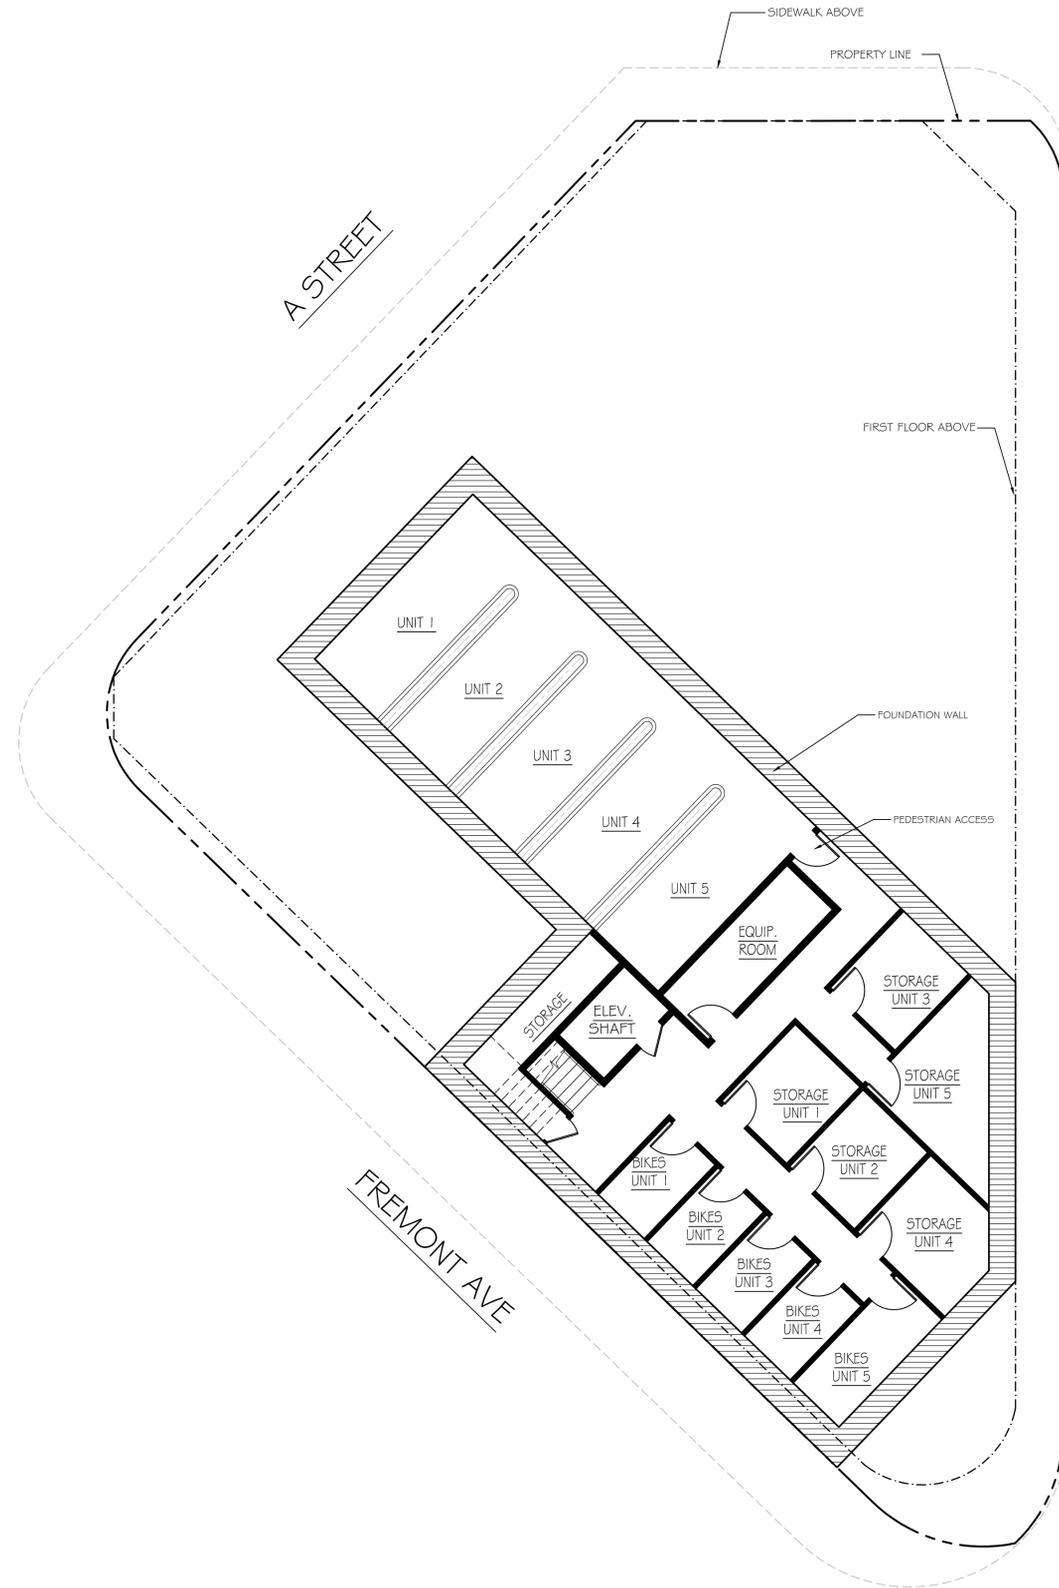

MIRAMONTE AVE

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
OVERALL BASEMENT PLAN

08-21-14

A2.0

OVERALL BASEMENT PLAN



SCALE: 1/8"=1'-0"

1

DATE	REVISION

M-DESIGNS ARCHITECTS
 M-DESIGNS ARCHITECTS
 4546 EL CAMINO REAL,
 STE 223, LOS ALTOS, CA
 www.mdesignsarchitects.com
 info@mdesignsarchitects.com
 PH: 650-565-9036 FAX: 650-949-7869


LOYOLA CORNERS
 999 FREMONT AVE
 LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
 PARTIAL BASEMENT PLAN


08-21-14

A2.01

NOT FOR CONSTRUCTION
 DRAFT REVIEW ONLY

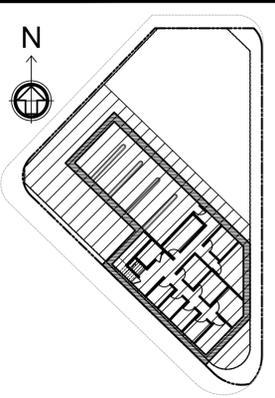

KEY PLAN

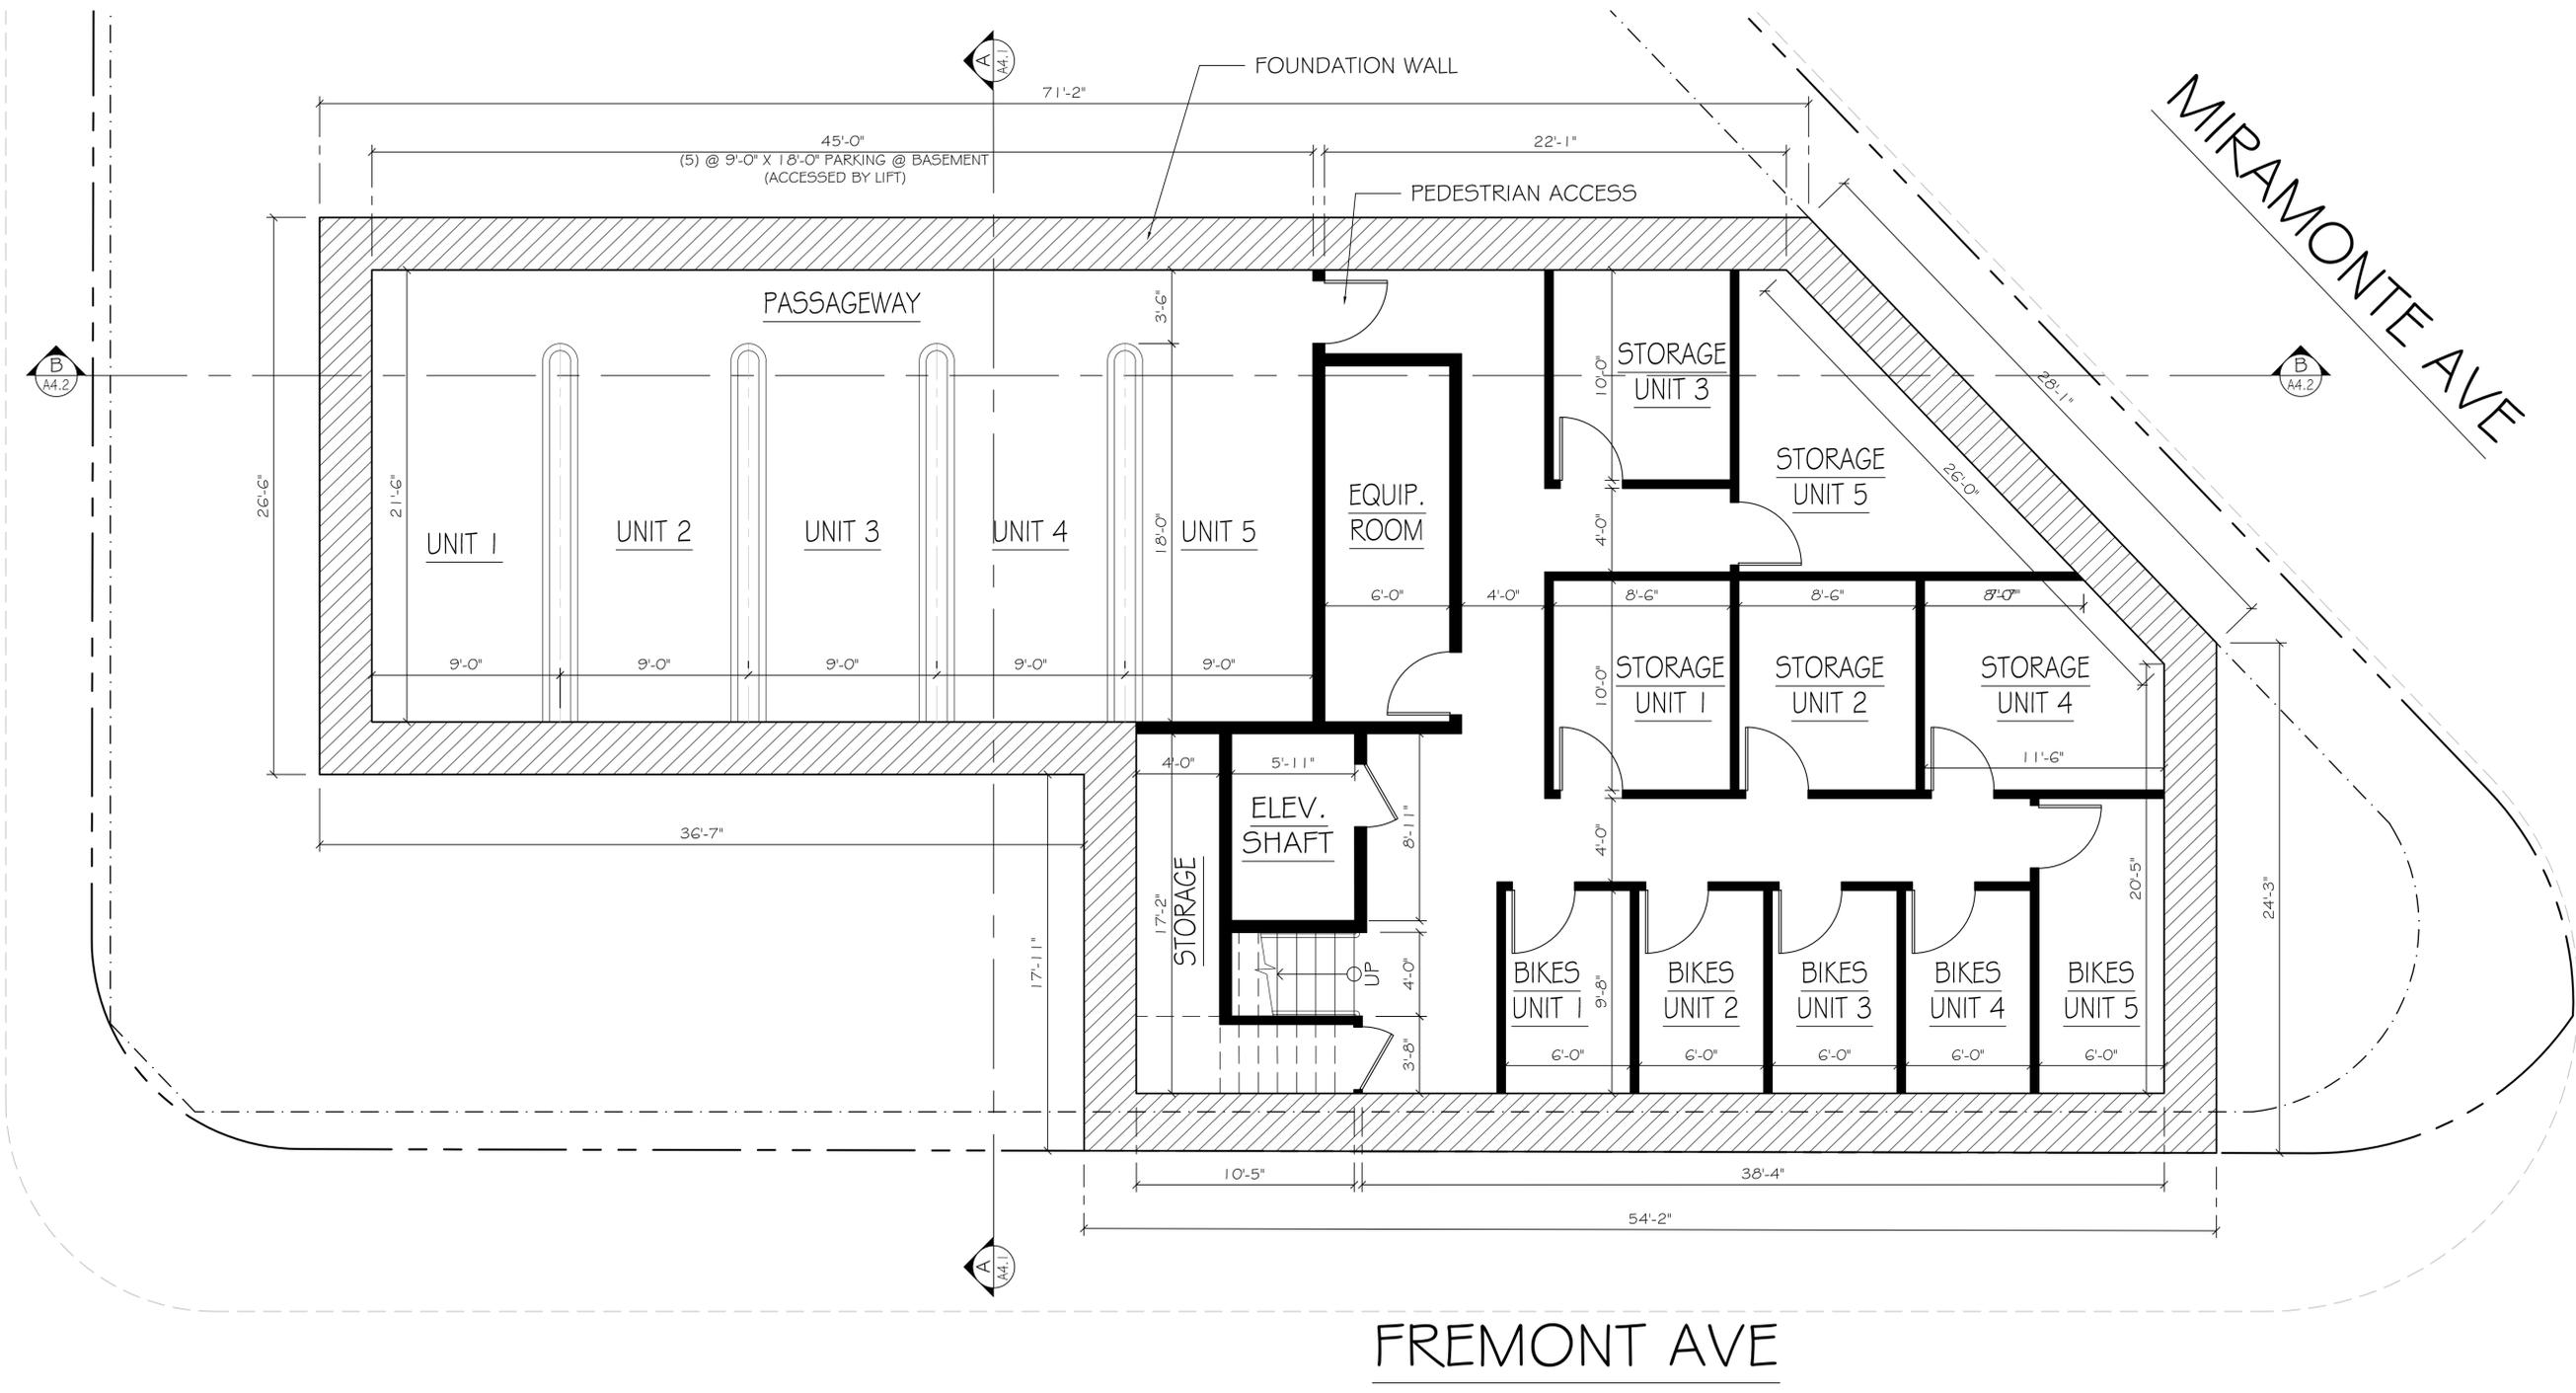

PARTIAL BASEMENT PLAN



SCALE: 1/4"=1'-0" 1




NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE	REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9038 FAX: 650-565-7869

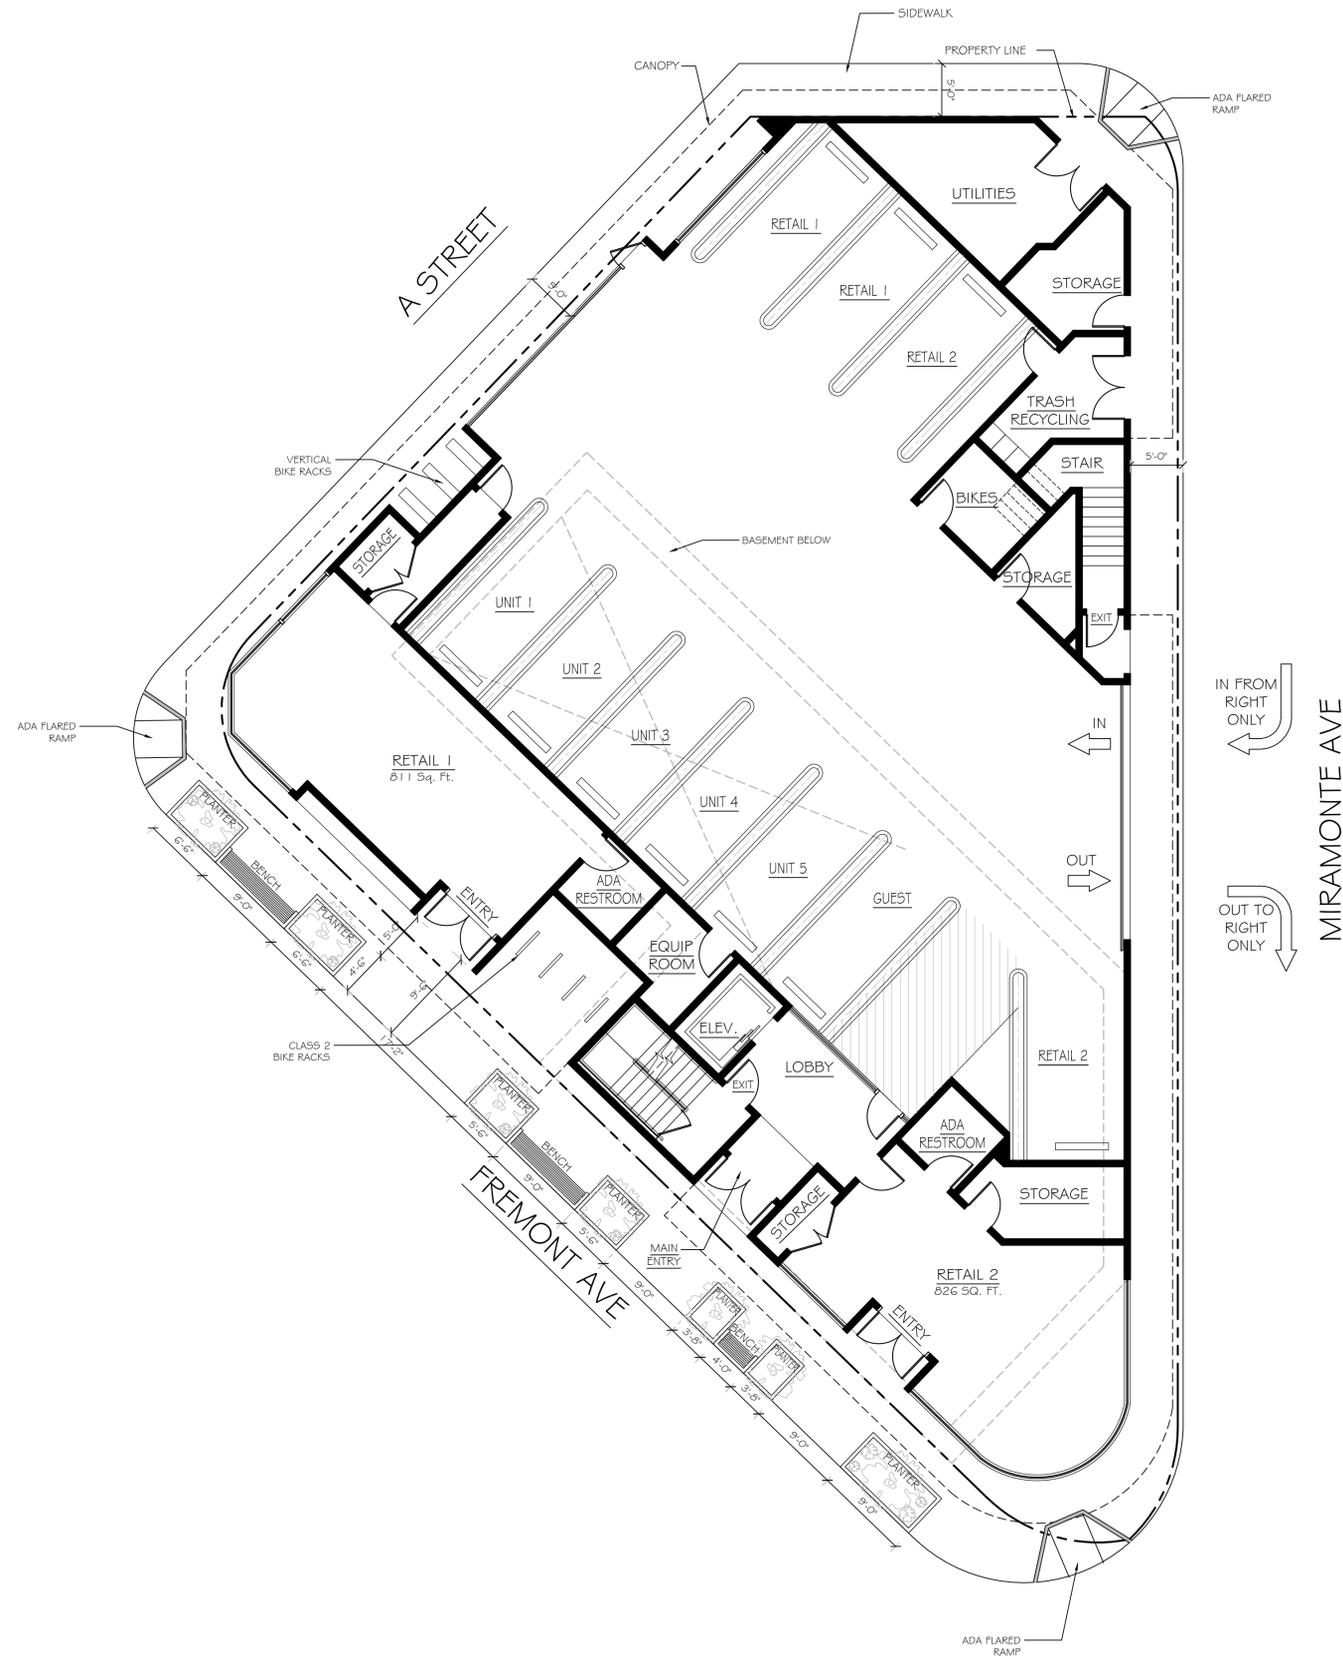

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
OVERALL GROUND
FLOOR PLAN

08-21-14

A2.1

OVERALL GROUND FLOOR PLAN





SCALE: 1/8"=1'-0" 1

DATE	REVISION

NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-949-7869

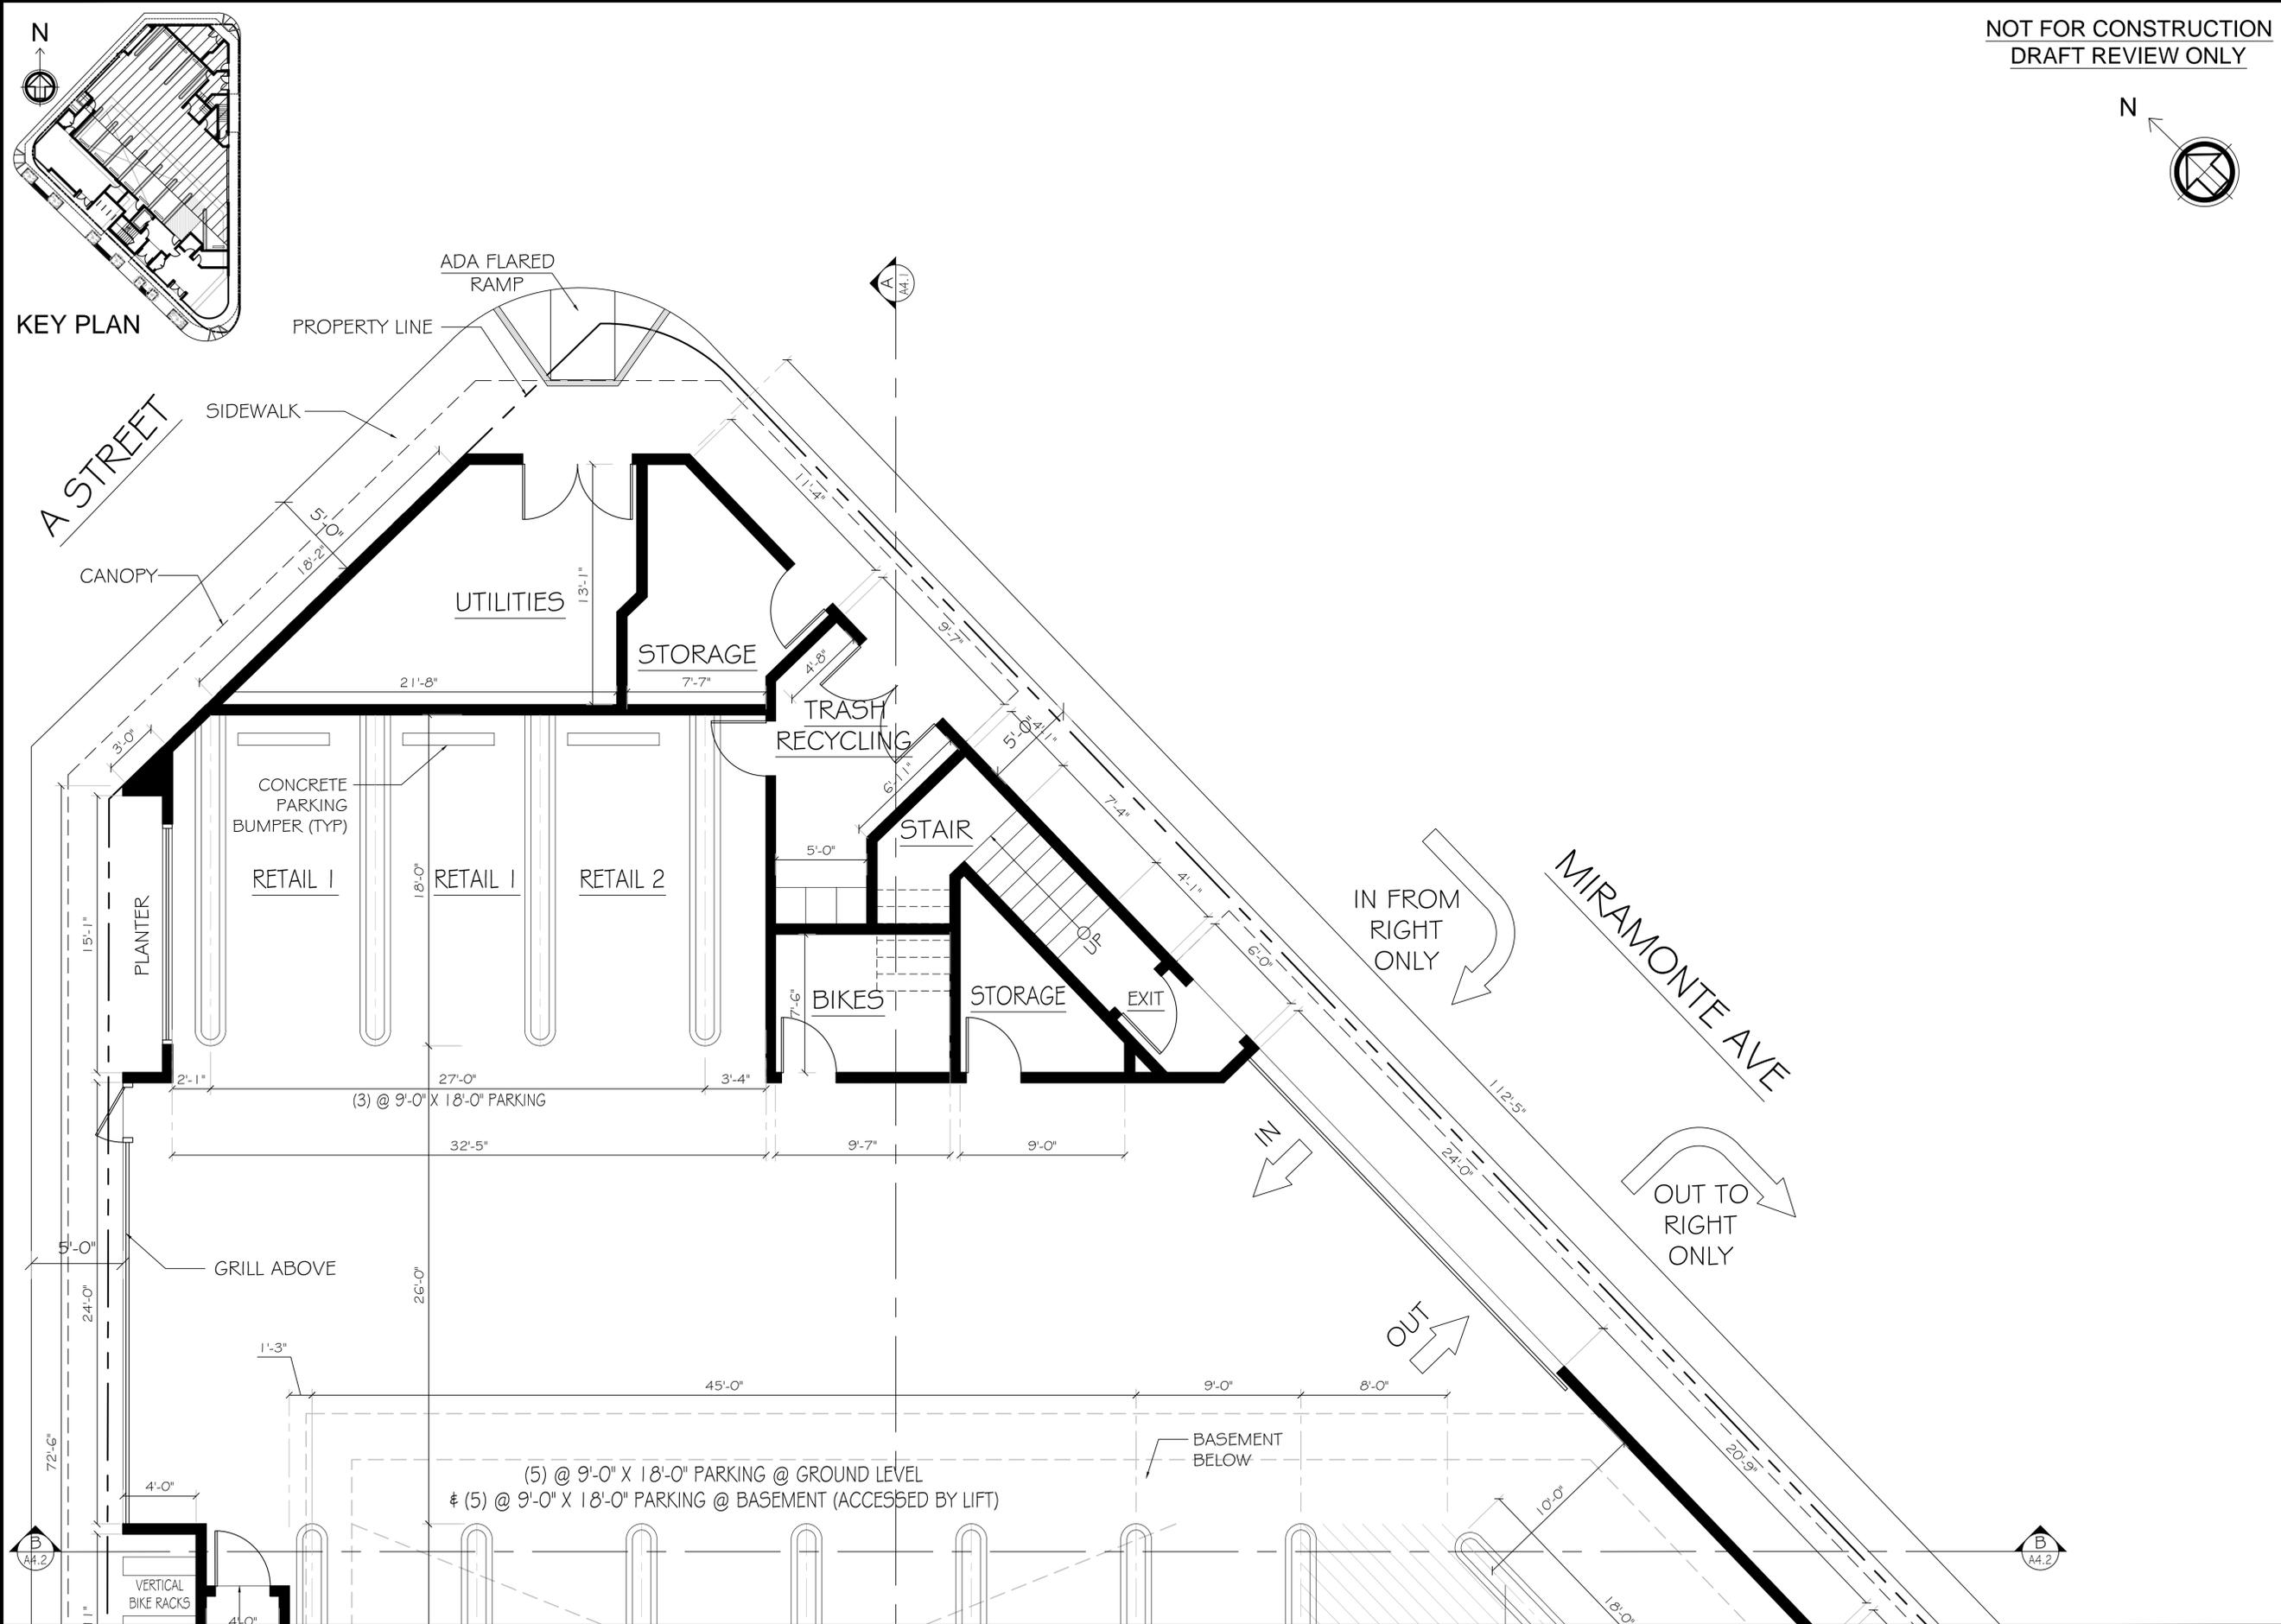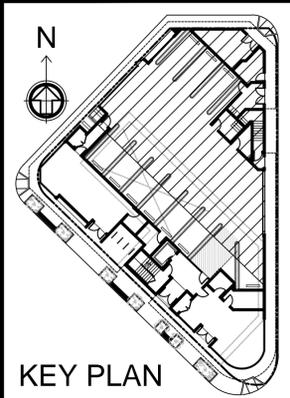

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024


DESIGN DEVELOPMENT
PARTIAL GROUND
FLOOR PLAN

08-21-14

A2.11

PARTIAL GROUND FLOOR PLAN

SCALE: 1/4"=1'-0" 1

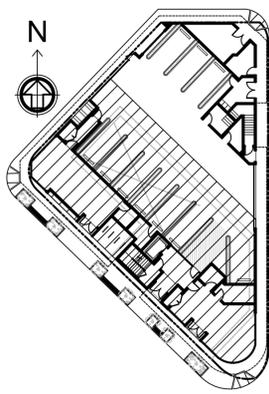

KEY PLAN



NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE REVISION

DATE	REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9038 FAX: 650-949-7869

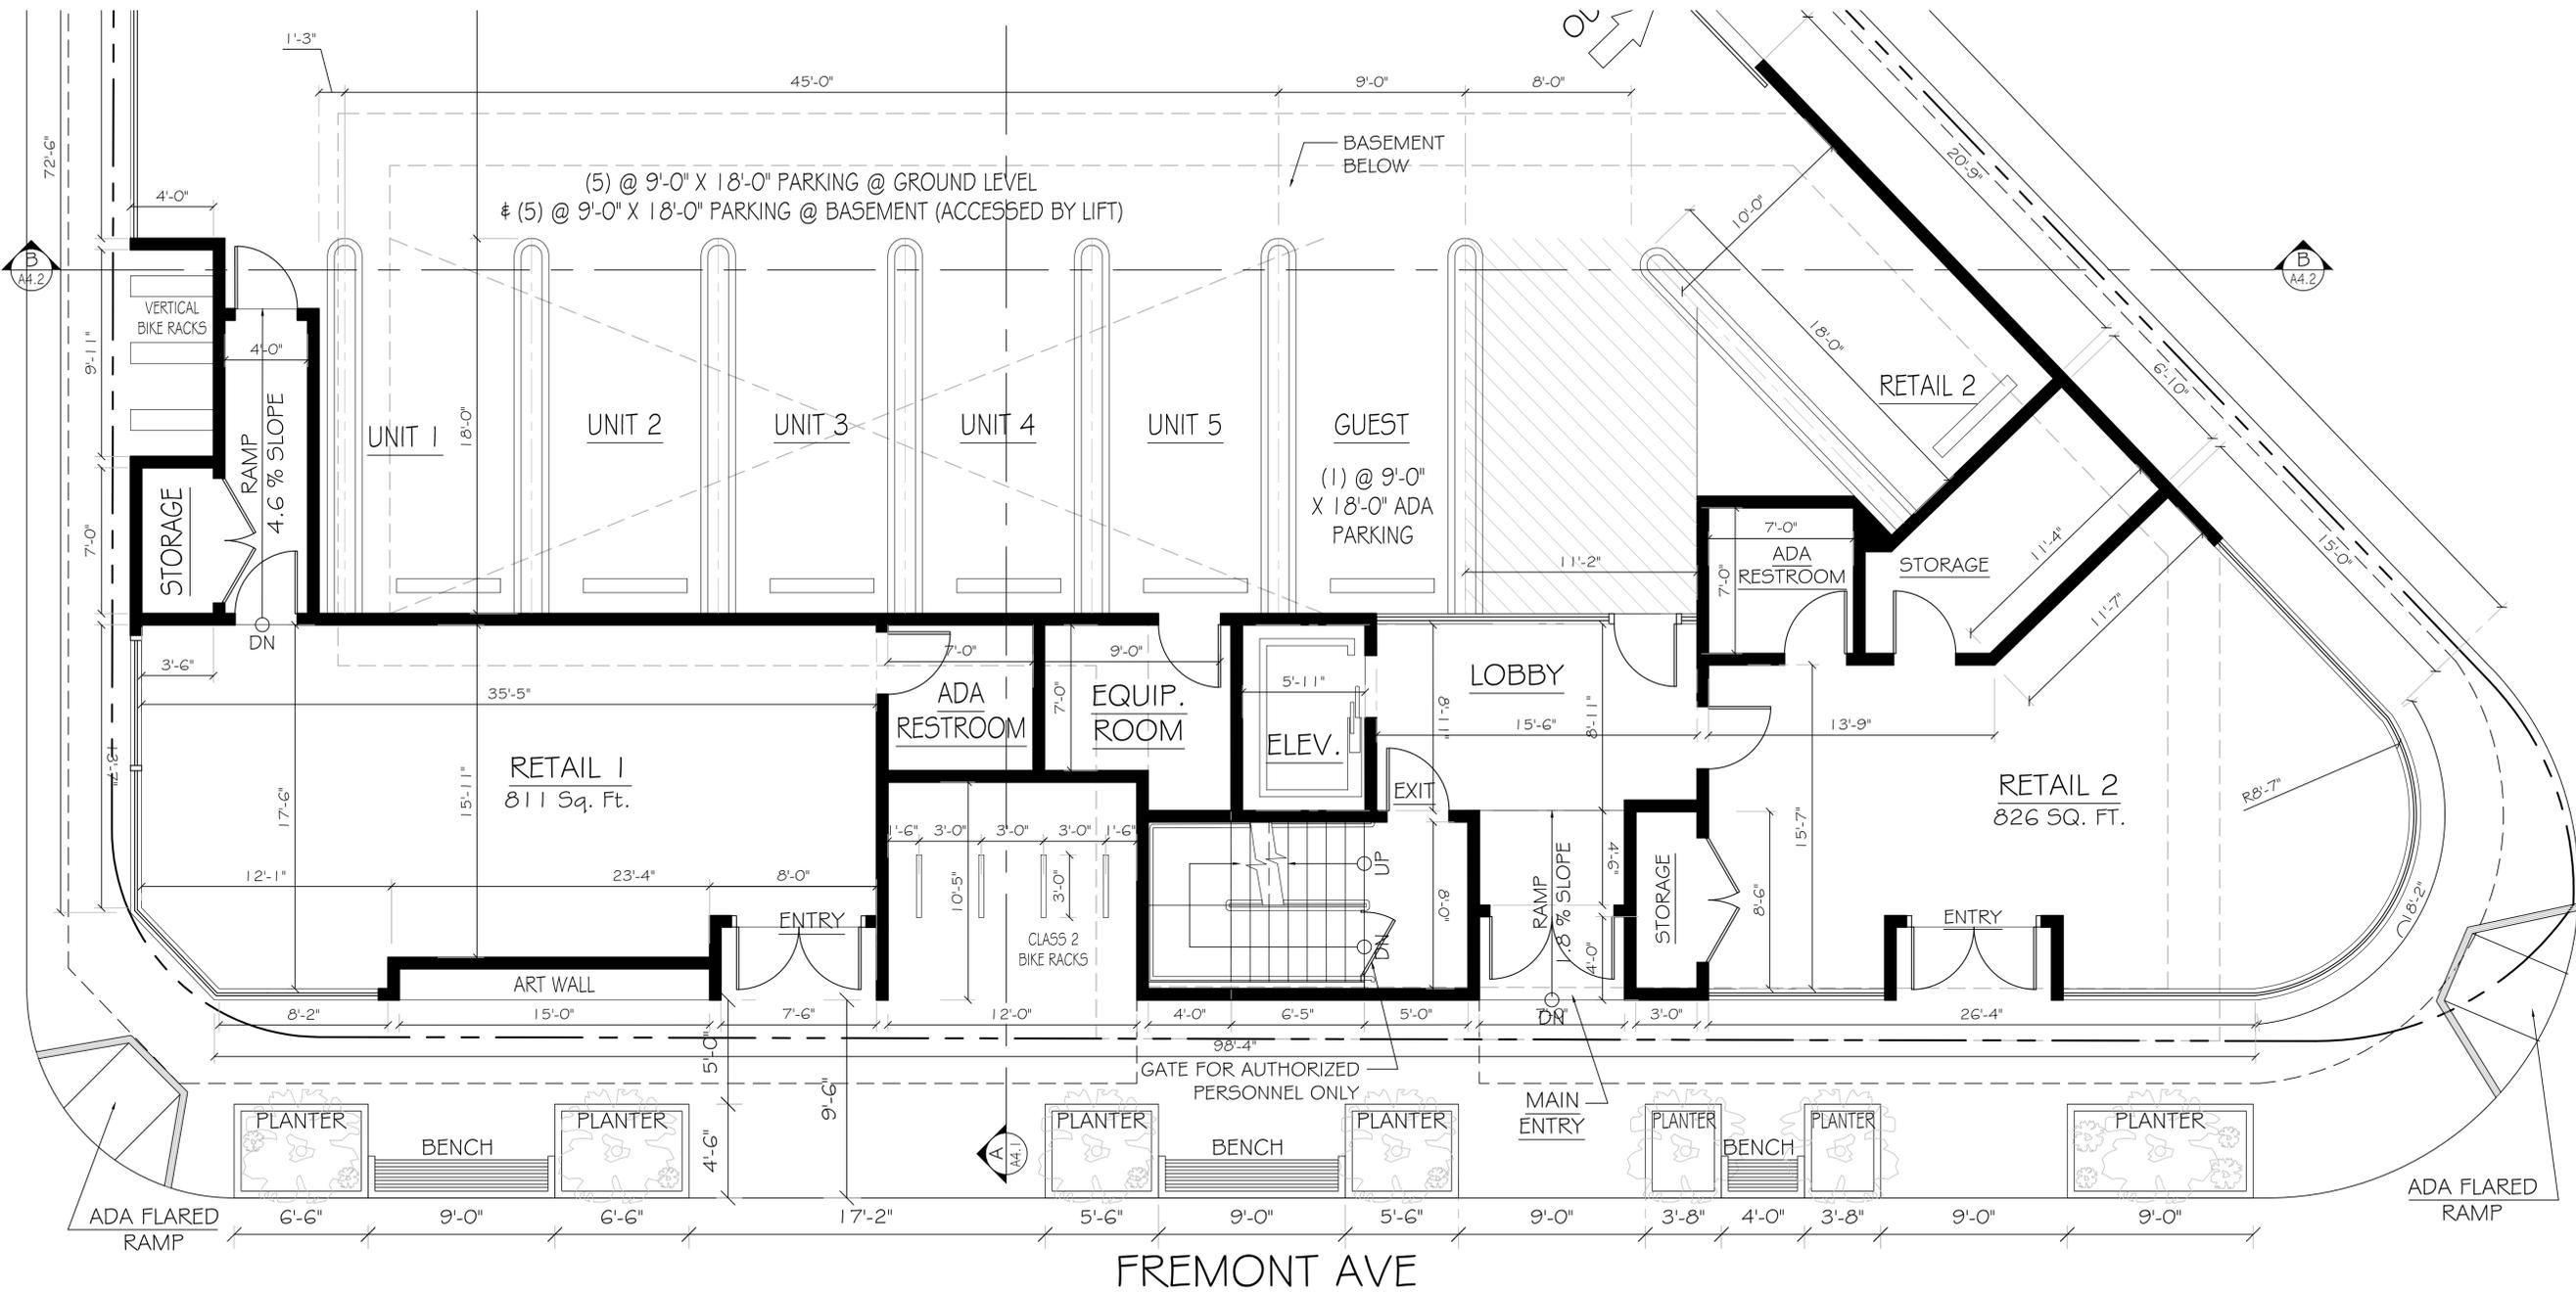

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
PARTIAL GROUND
FLOOR PLAN

08-21-14

A2.12

PARTIAL GROUND FLOOR PLAN



SCALE: 1/4"=1'-0" 1




NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE	REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9038 FAX: 650-949-7869

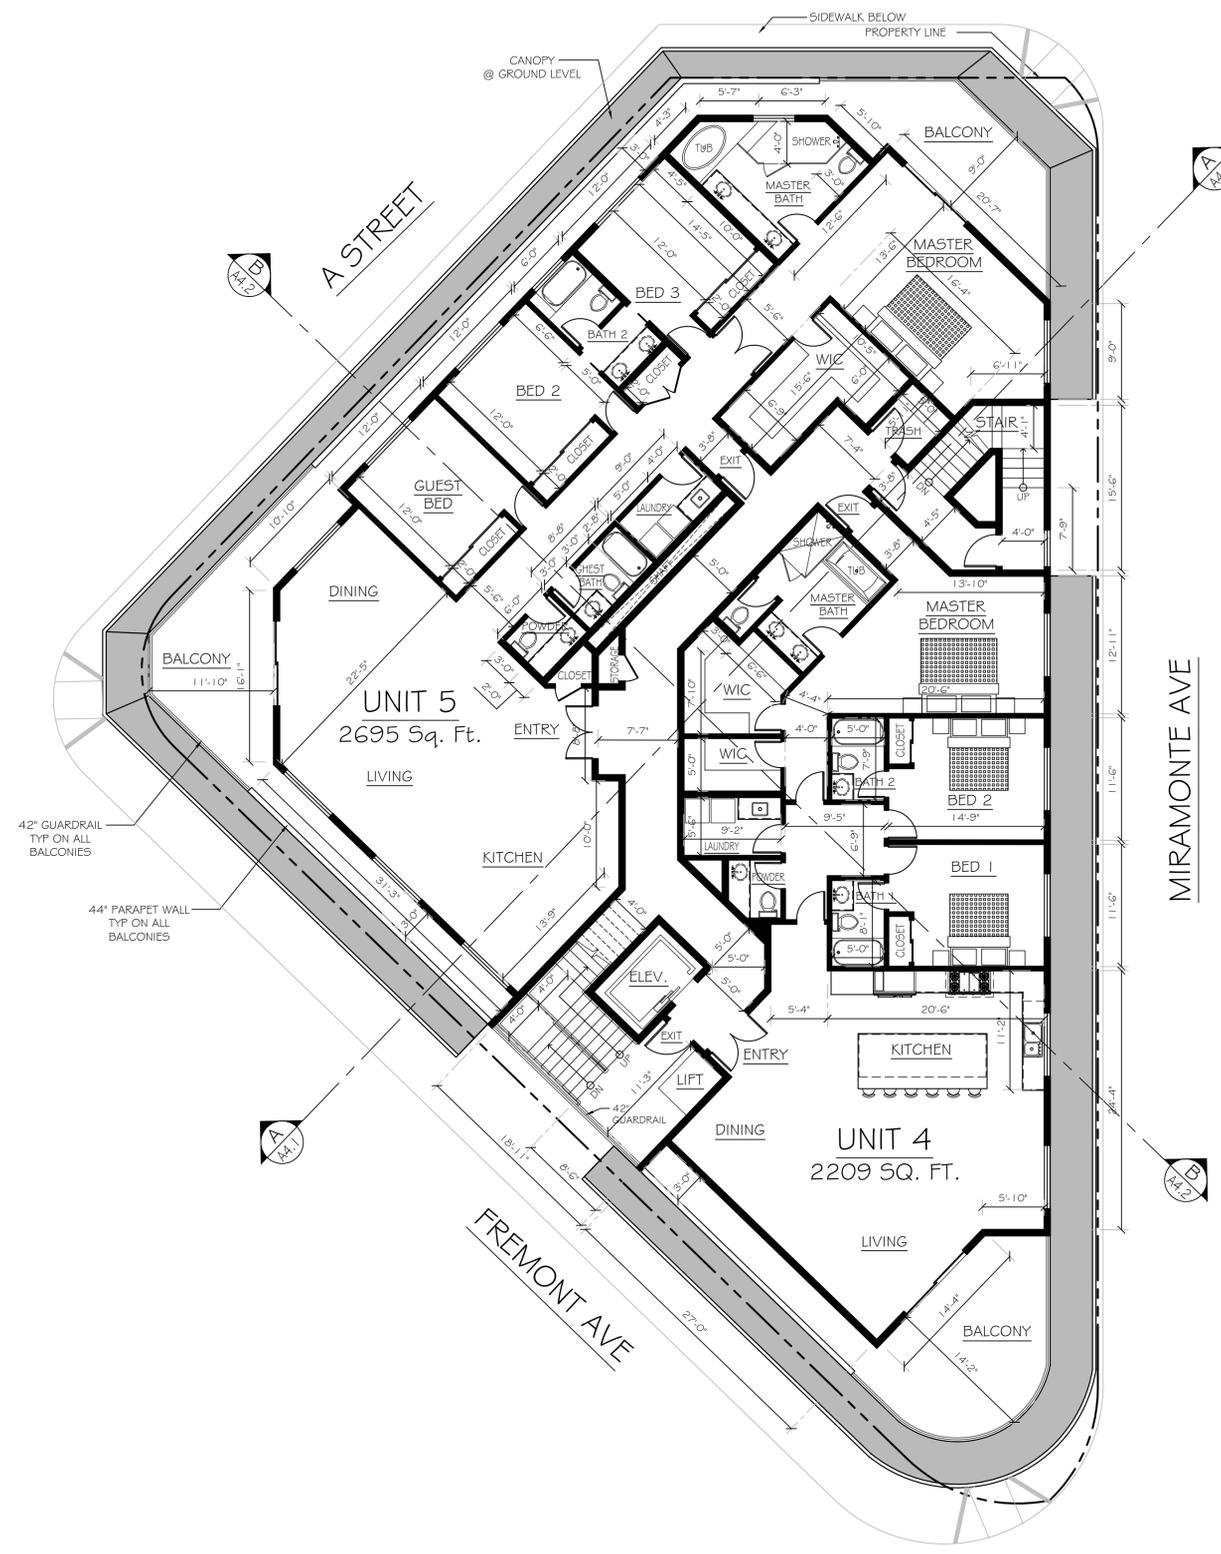

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
PROPOSED
THIRD FLOOR PLAN

08-21-14

A2.3

PROPOSED THIRD FLOOR PLAN



SCALE: 1/8"=1'-0" 1

**NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY**

- 1) ROOF
- STANDING SEAM METAL ROOF
- 2) WALL MATERIALS (AS PER ELEVATIONS)
- HORIZONTAL SIDING
- STUCCO WITH EXPANSION JOINTS
- PRECAST STONE PANELS
- 3) WINDOWS & DOORS @ UNITS
- CLAD (METAL @ EXTERIOR & WOOD @ INTERIOR)
- 4) DOORS & GLASS PANELS @ GROUND LEVEL
- DOUBLE PANE TEMPERED GLASS
- 5) SERVICE DOORS @ GROUND LEVEL
- WEATHER RESISTANT METAL DOORS
- 6) GARAGE DOOR
- MOTORIZED SLIDING DOOR WITH METAL MESH
- 7) PERGOLA
- STAINED WOOD
- 8) GUARD RAILS
- METAL HANDRAIL WITH TEMPERED GLASS PANELS




M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-925-7869



MIRAMONTE AVE


1

EXTERIOR FINISHES

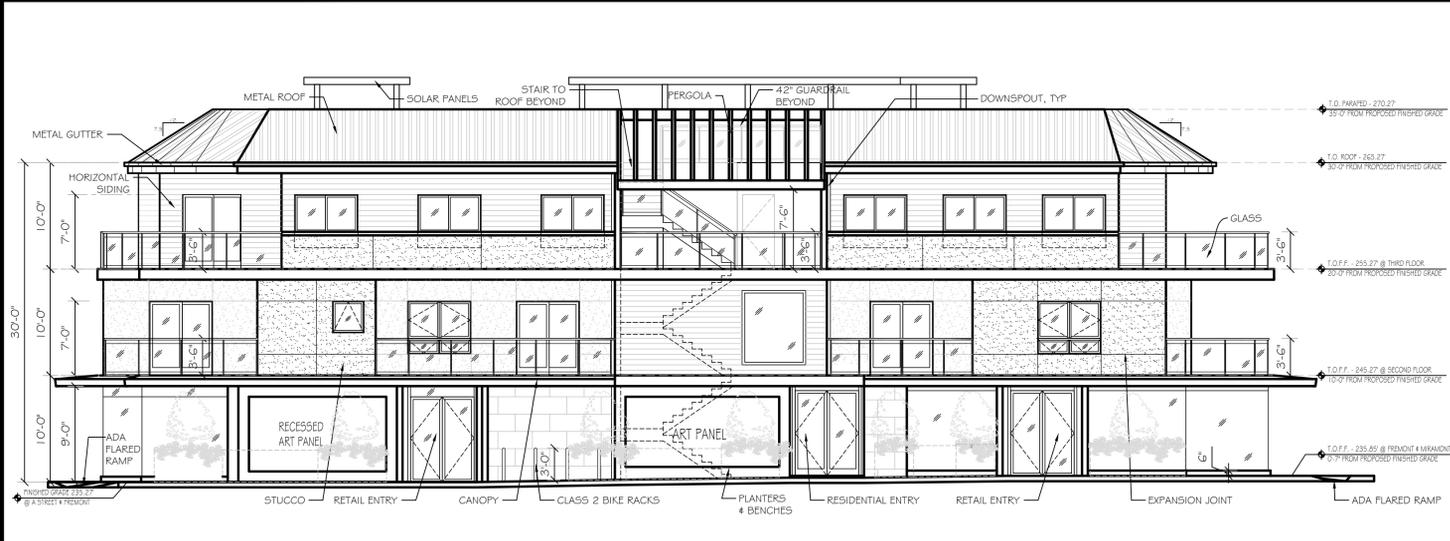


2

FREMONT AVE

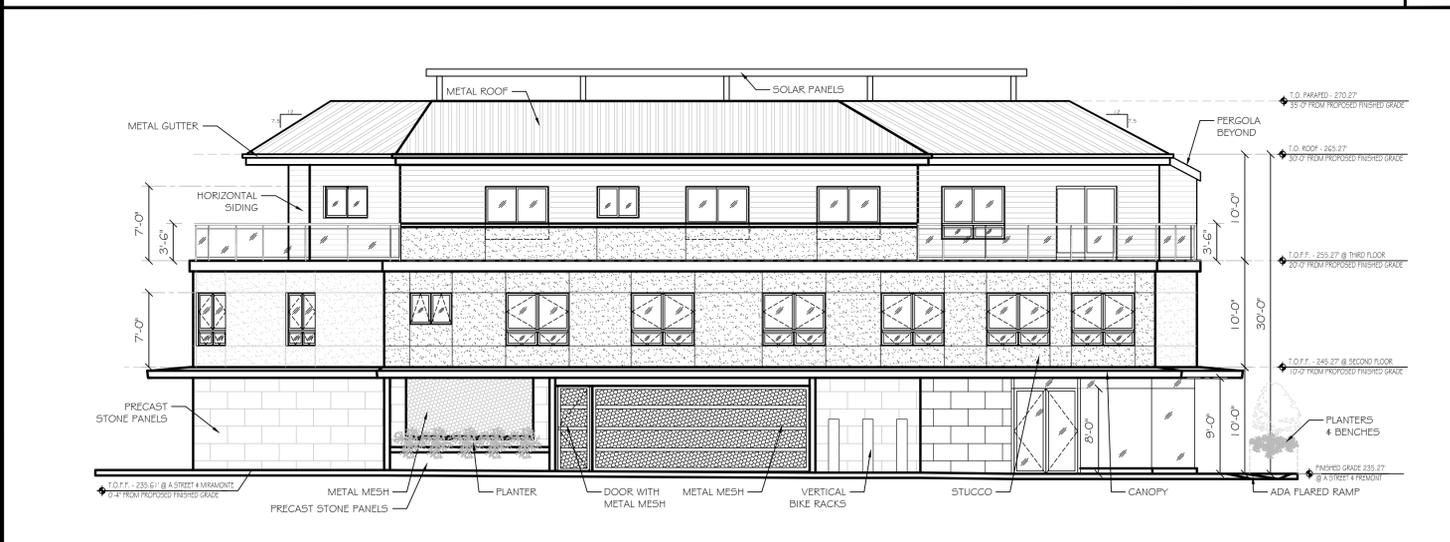

3

A STREET

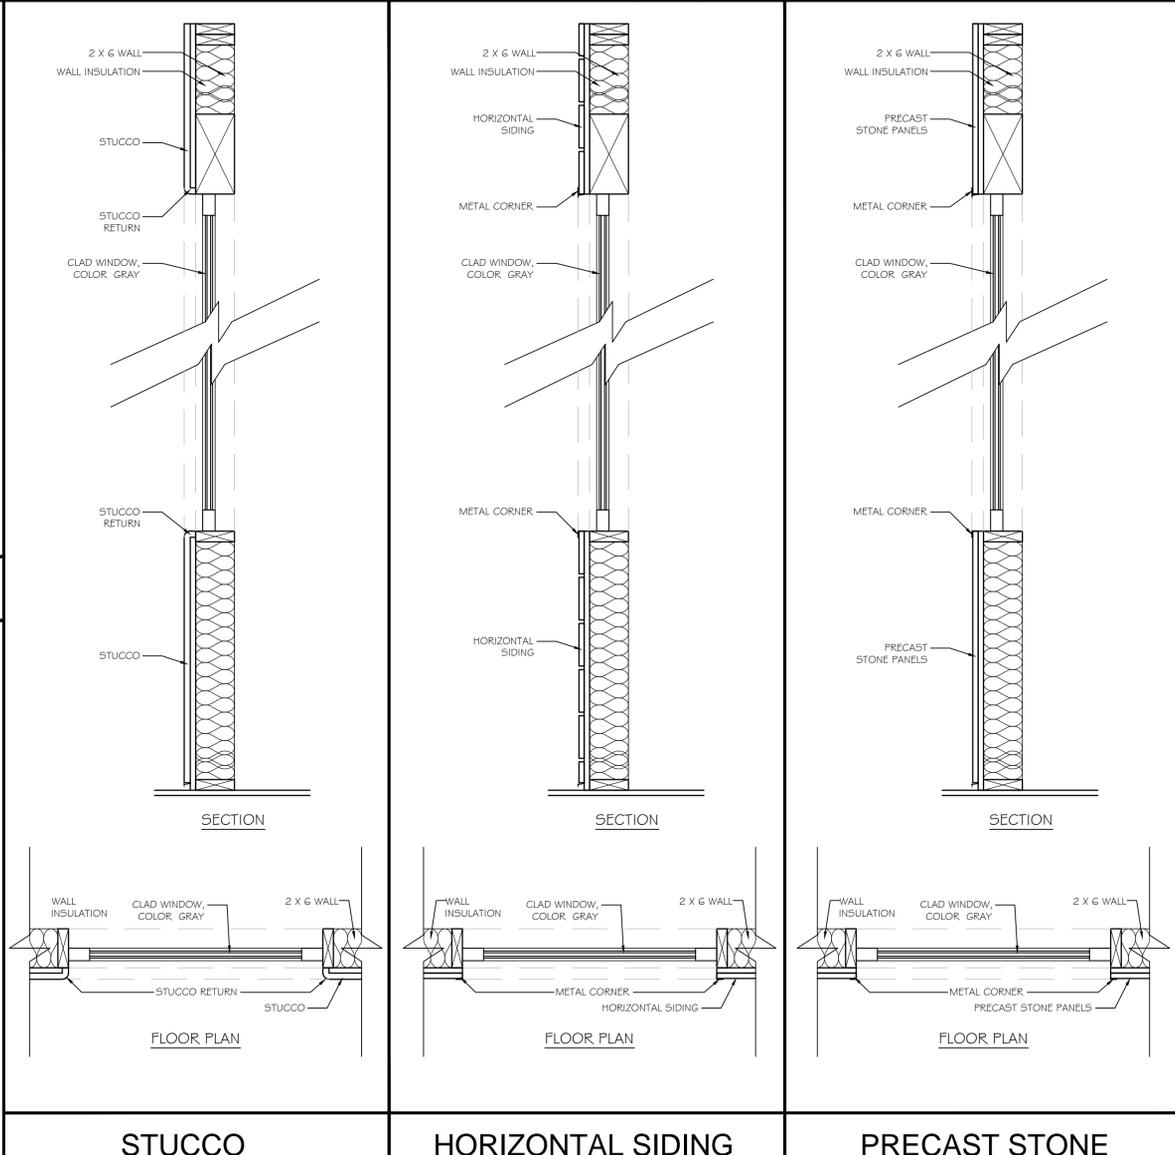

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
PROPOSED ELEVATIONS

08-21-14

A3.1

DATE	REVISION

NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-925-7869



MIRAMONTE AVE - SOUTH PORTION

1



MIRAMONTE AVE - NORTH PORTION



SCALE: 1/4"=1'-0"

2

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
PROPOSED ELEVATION
@ MIRAMONTE AVE

08-21-14


A3.11

DATE	REVISION

**NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY**




M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-949-7869

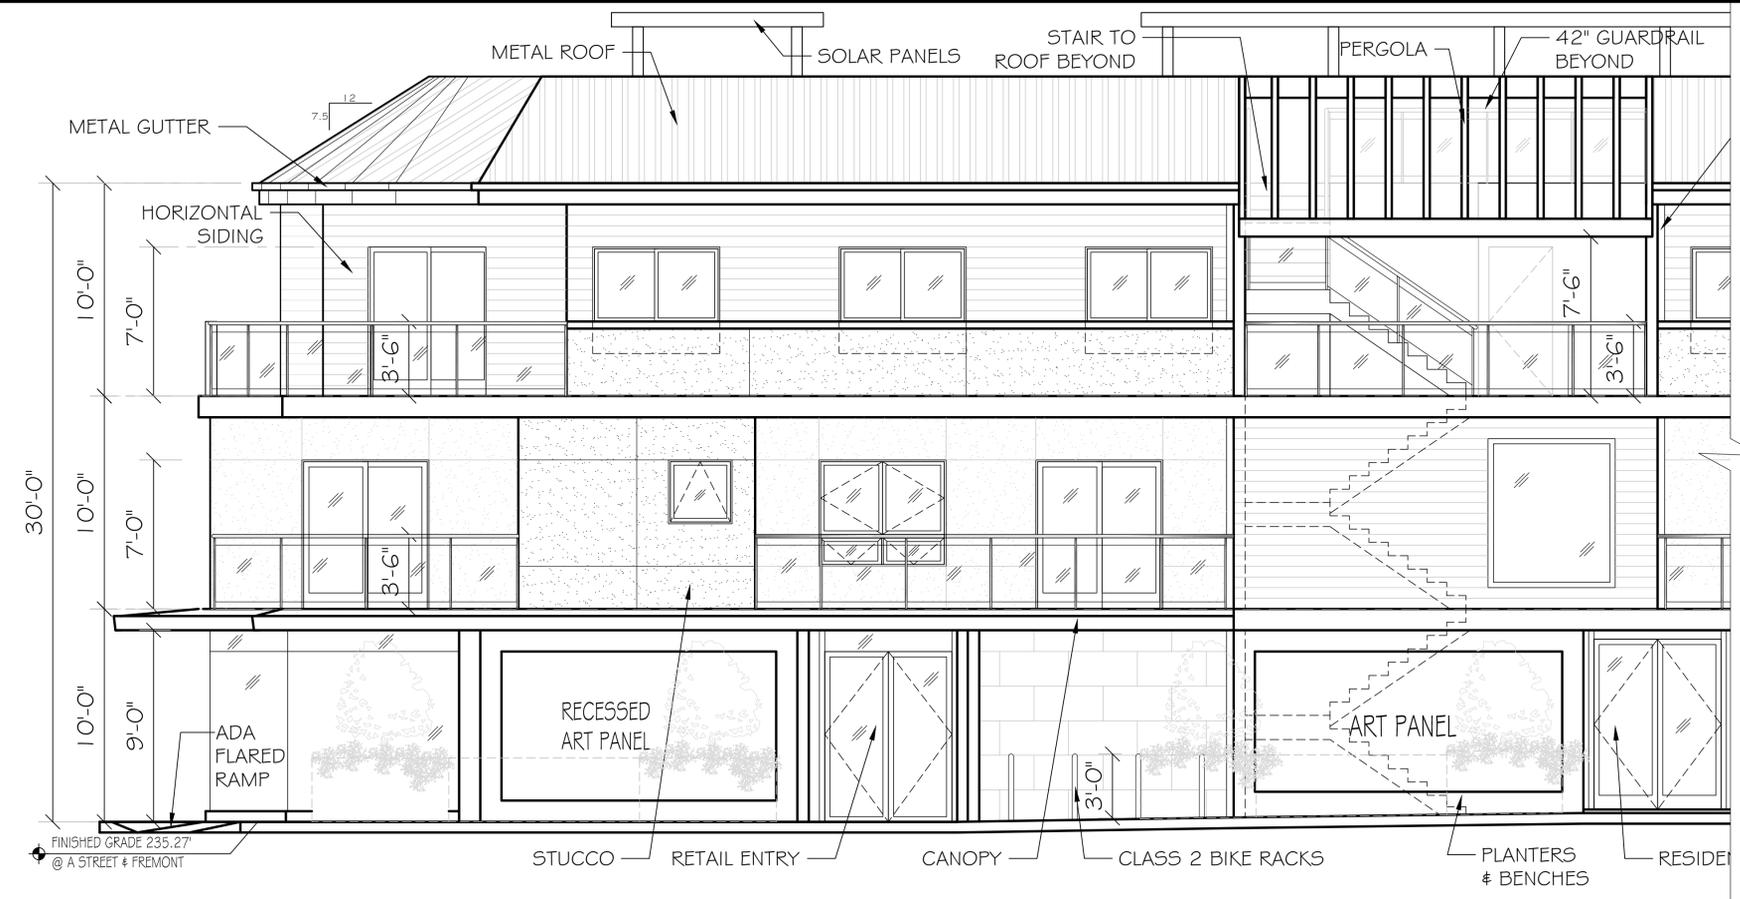

FREMONT AVE - WEST PORTION

1

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

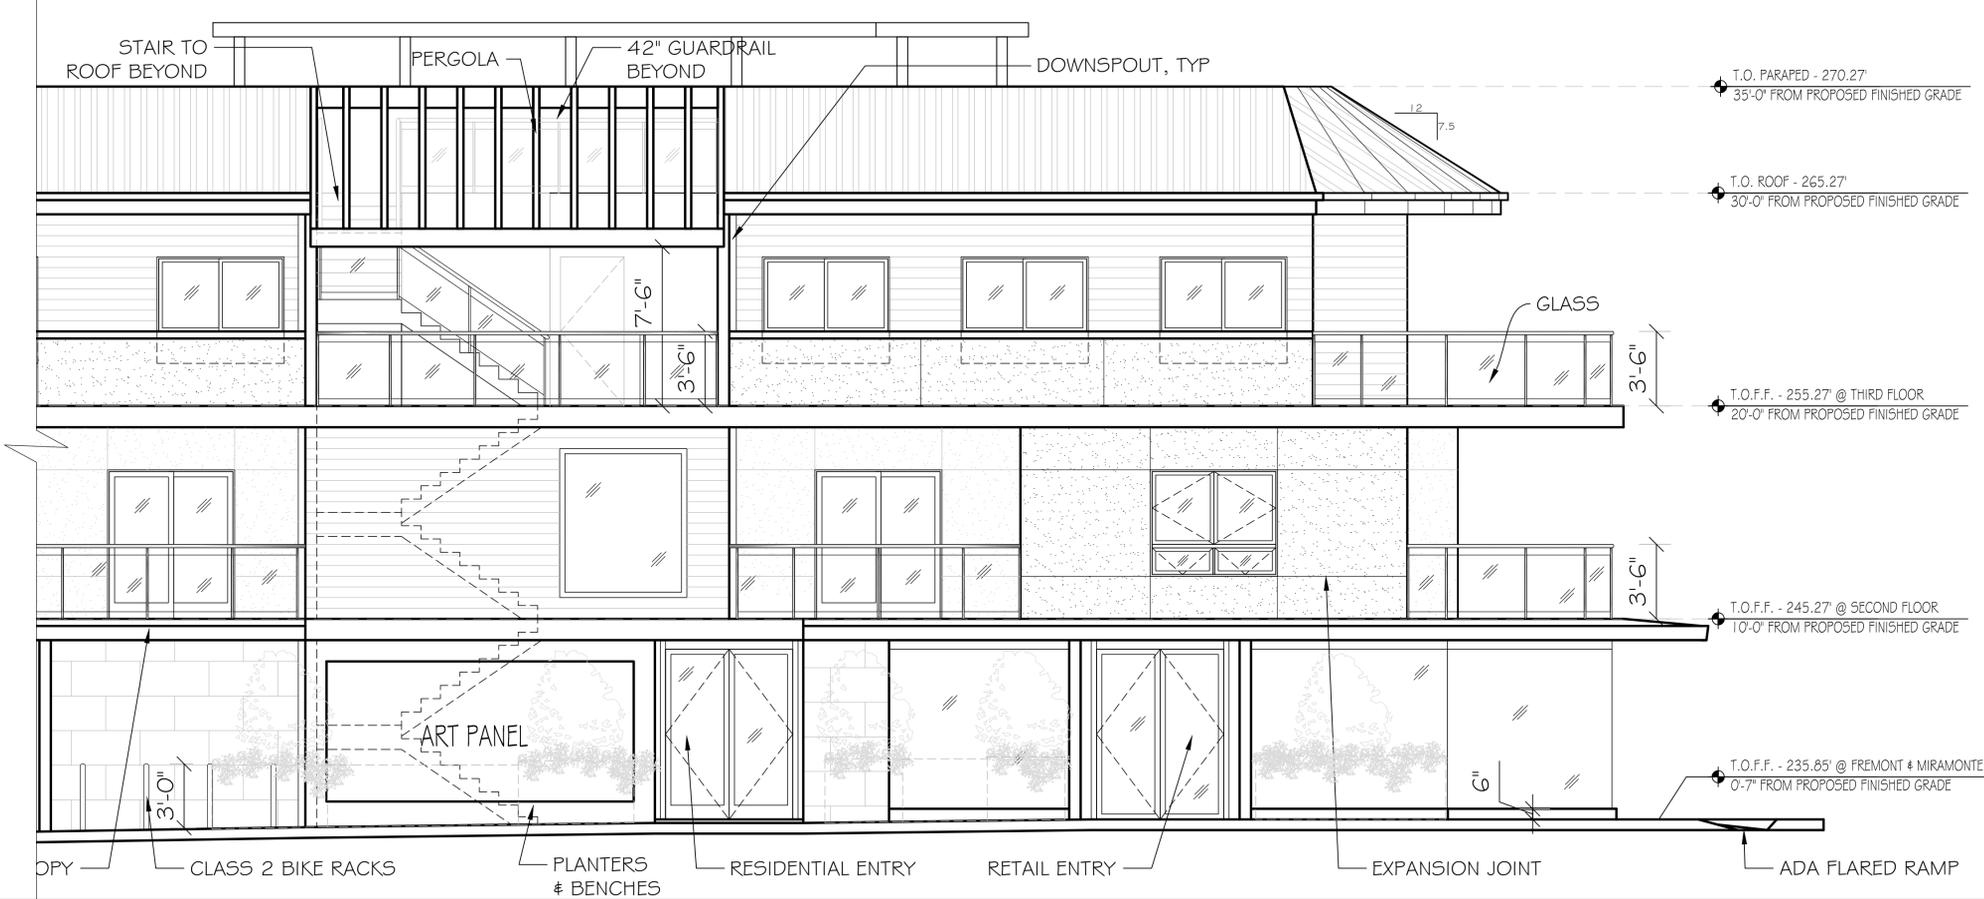

FREMONT AVE - EAST PORTION

DESIGN DEVELOPMENT
PROPOSED ELEVATION
@ FREMONT AVE

08-21-14

A3.12




SCALE: 1/4"=1'-0"

2

NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE	REVISION

M-DESIGNS ARCHITECTS
 M-DESIGNS ARCHITECTS
 4546 EL CAMINO REAL,
 STE 223, LOS ALTOS, CA
 www.mdesignsarchitects.com
 info@mdesignsarchitects.com
 PH: 650-565-9036 FAX: 650-565-7869

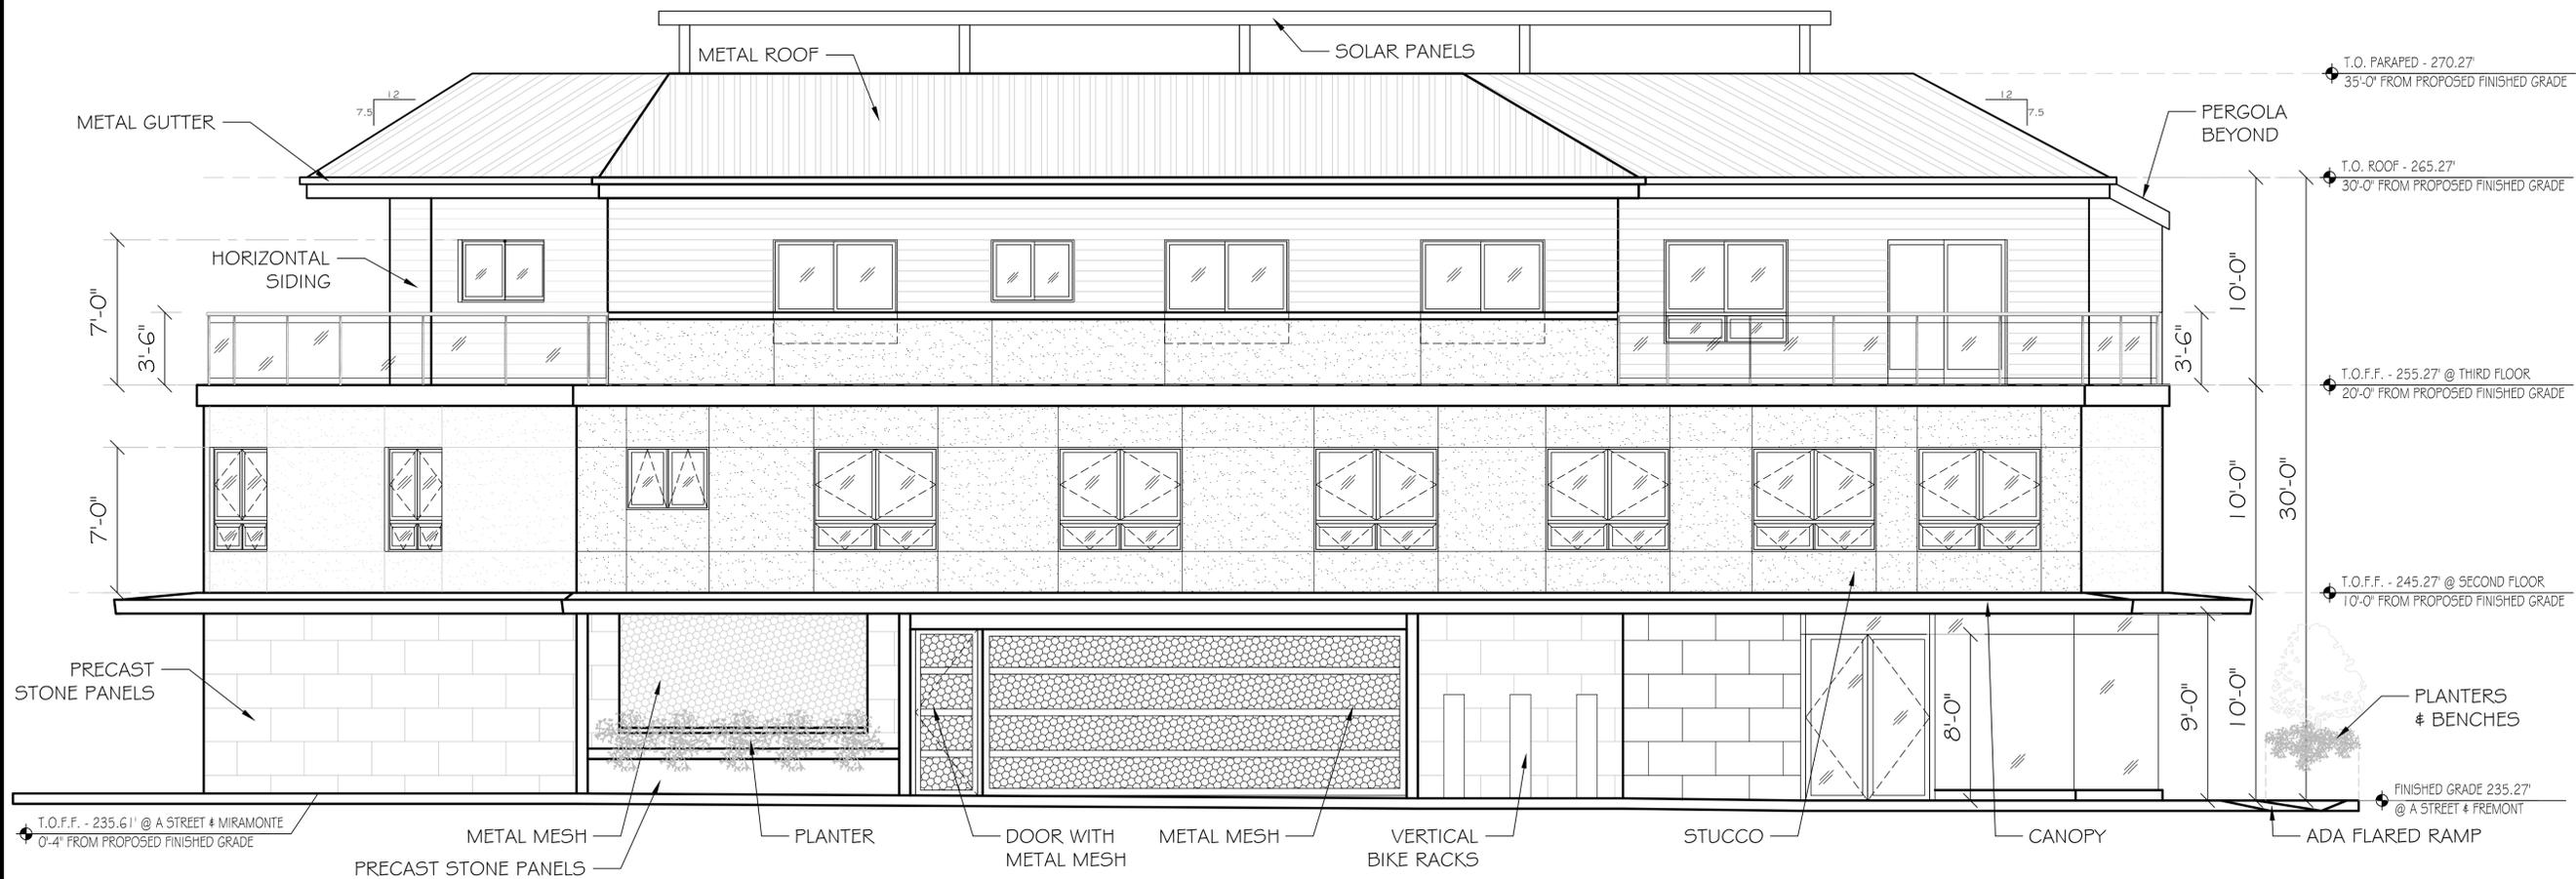

LOYOLA CORNERS
 999 FREMONT AVE
 LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
 PROPOSED ELEVATION
 @ A STREET

08-21-14

A3.13

A STREET



SCALE: 1/4"=1'-0" 1

NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE REVISION




M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-949-7869

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024


DESIGN DEVELOPMENT
SECTION A-A

08-21-14

A4.1

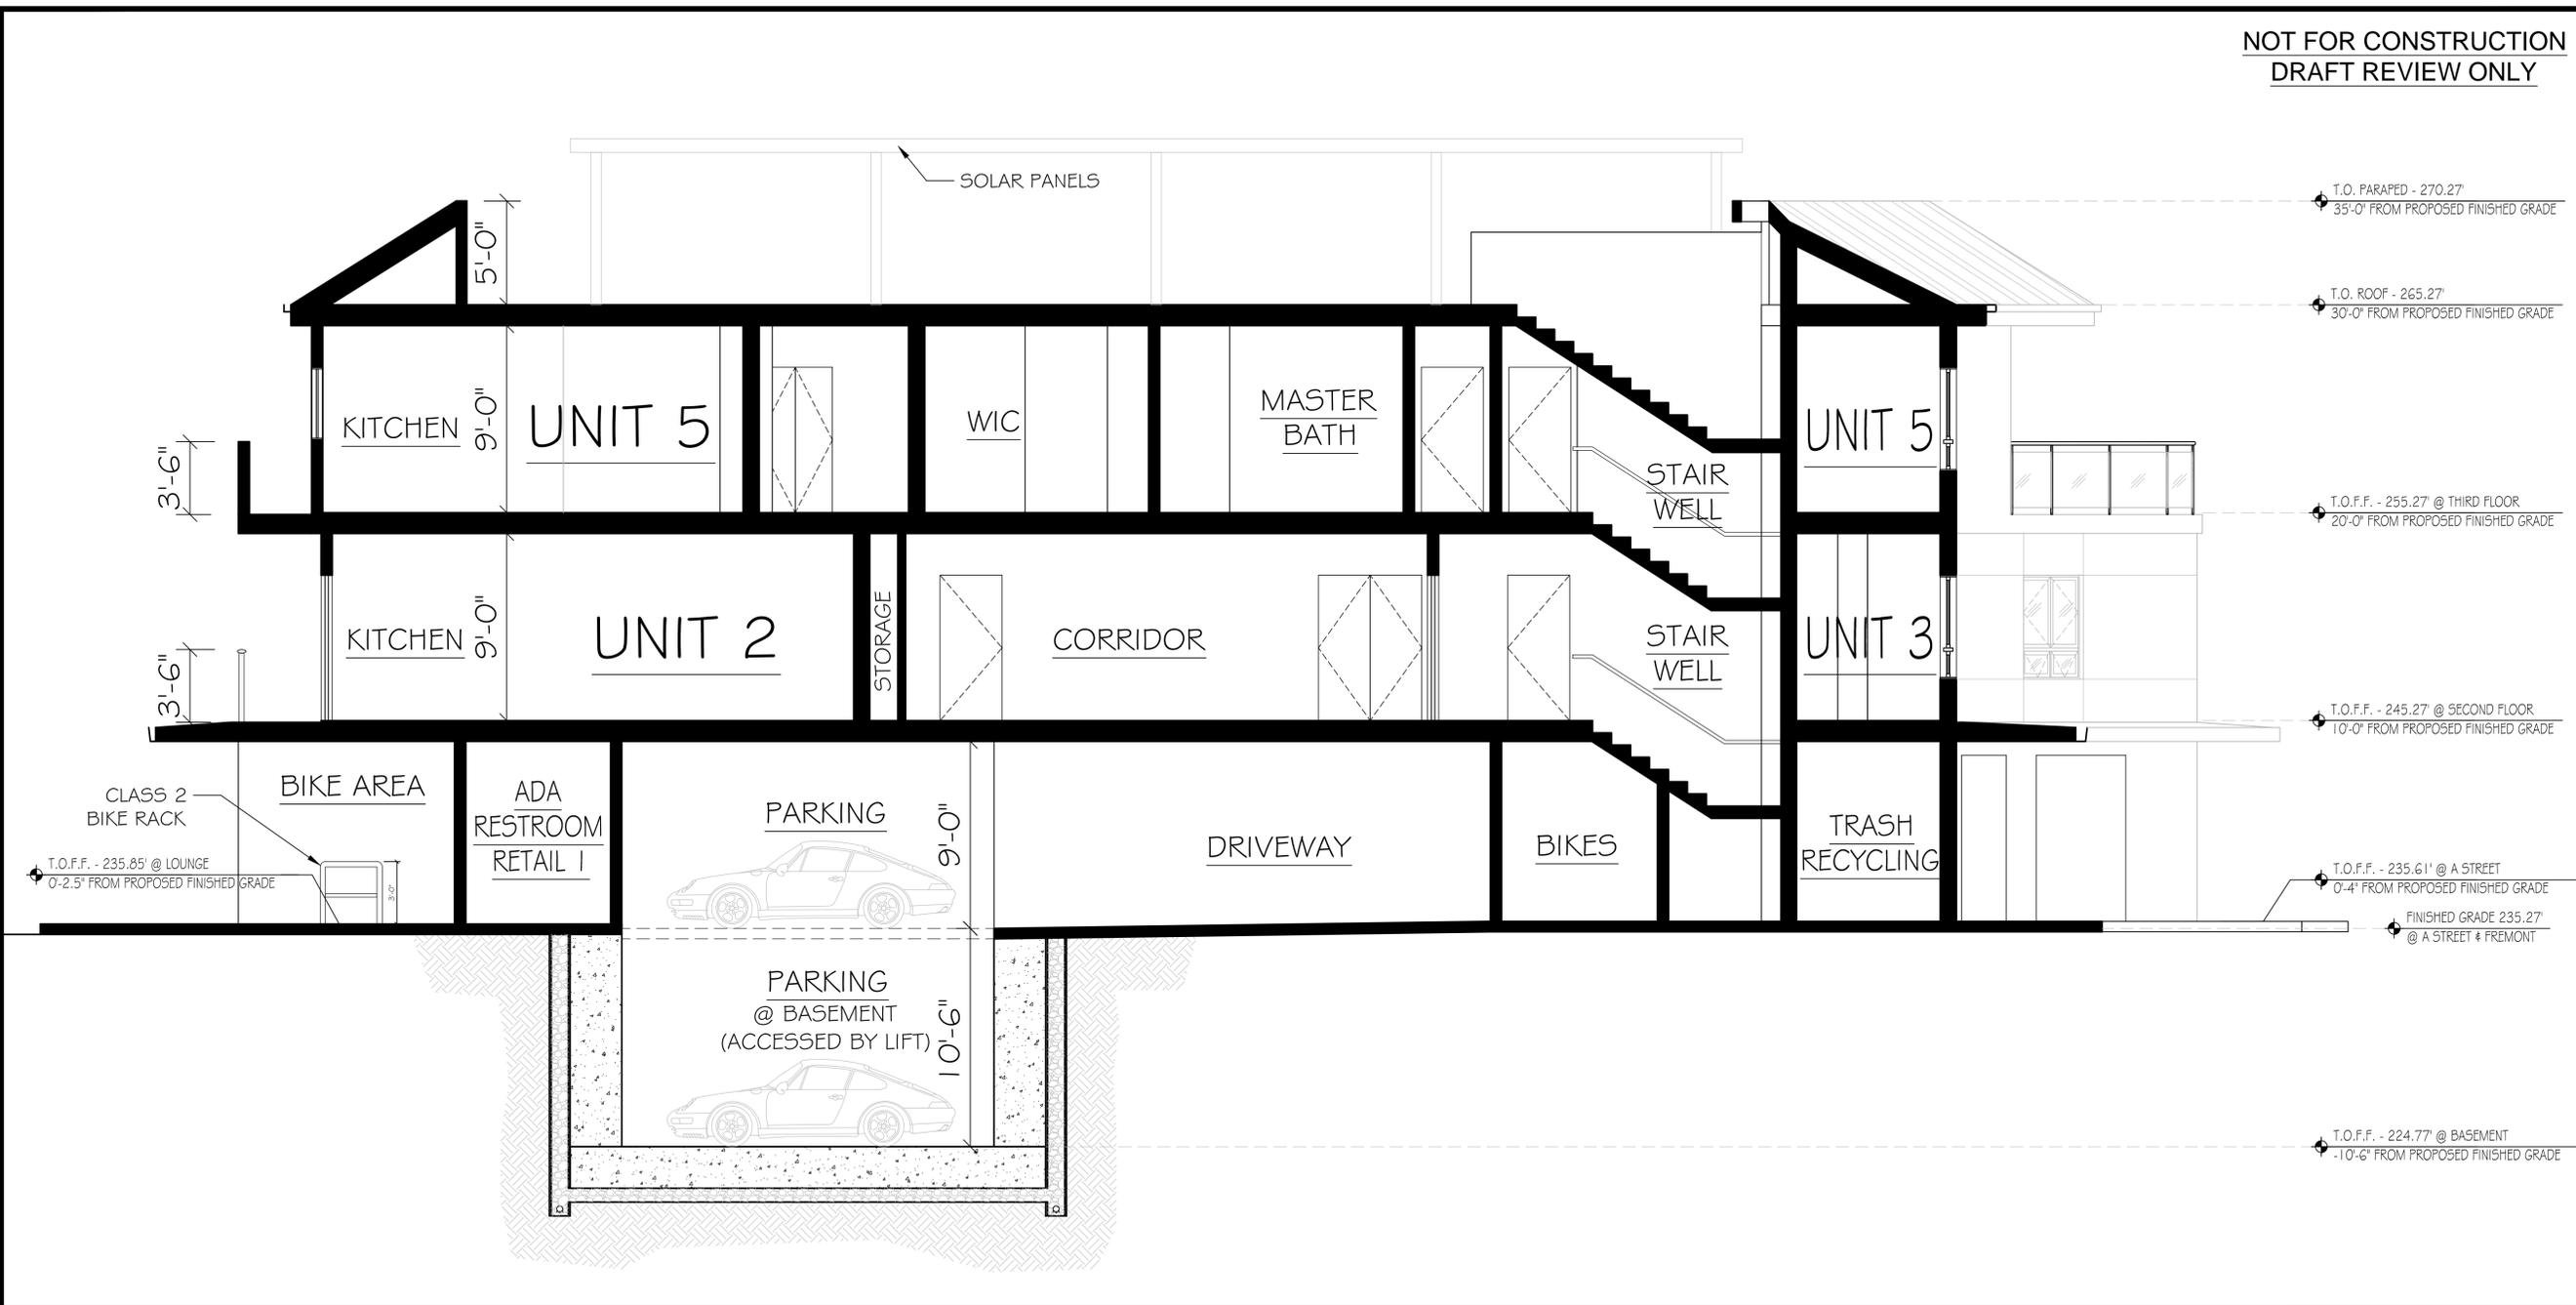

SECTION A-A

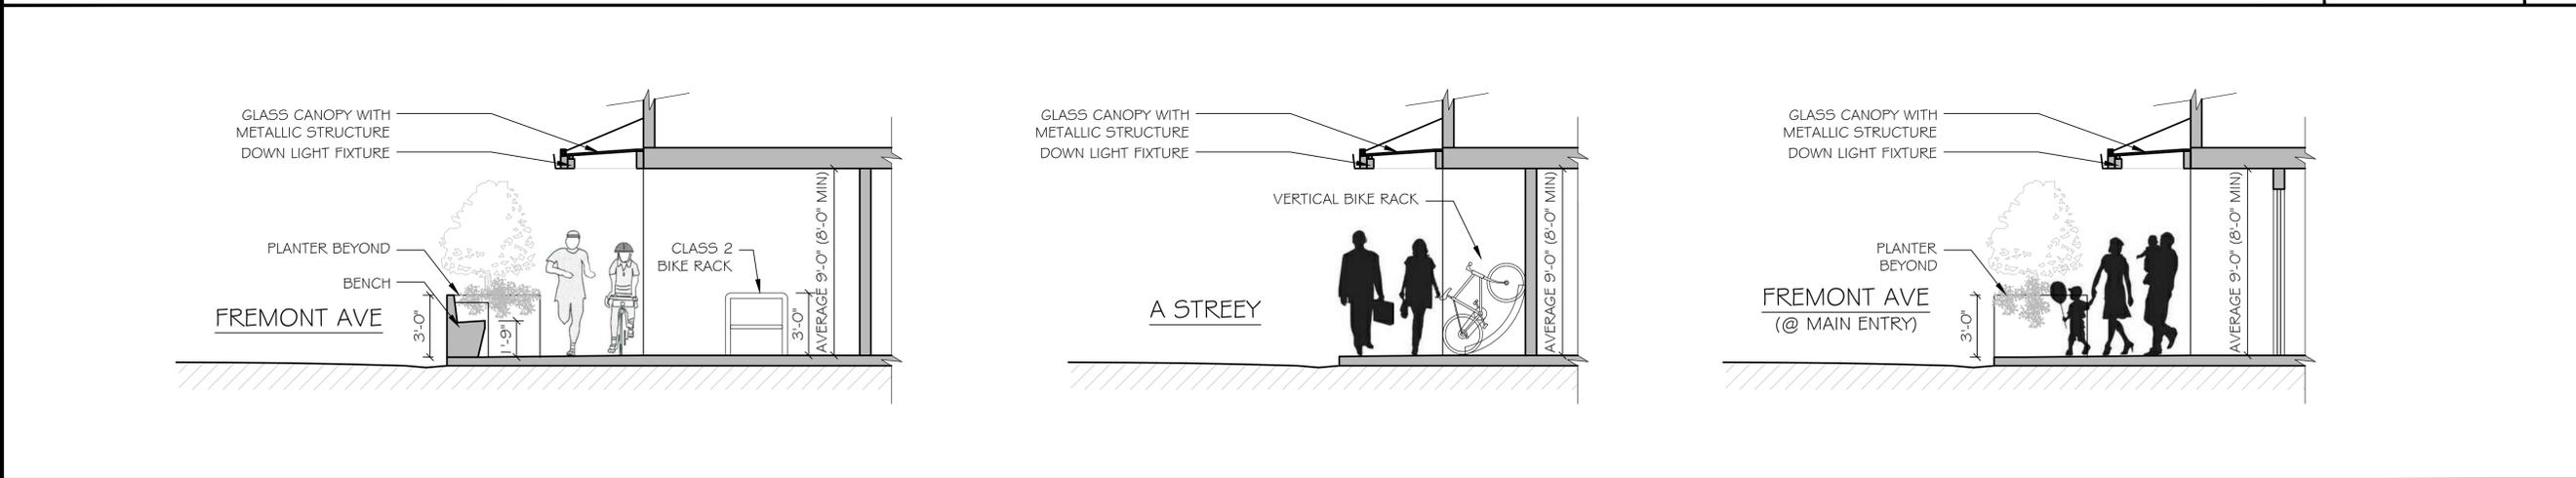

DETAIL SECTIONS




NOT FOR CONSTRUCTION
DRAFT REVIEW ONLY

DATE	REVISION



M-DESIGNS ARCHITECTS
4546 EL CAMINO REAL,
STE 223, LOS ALTOS, CA
www.mdesignsarchitects.com
info@mdesignsarchitects.com
PH: 650-565-9036 FAX: 650-925-7869

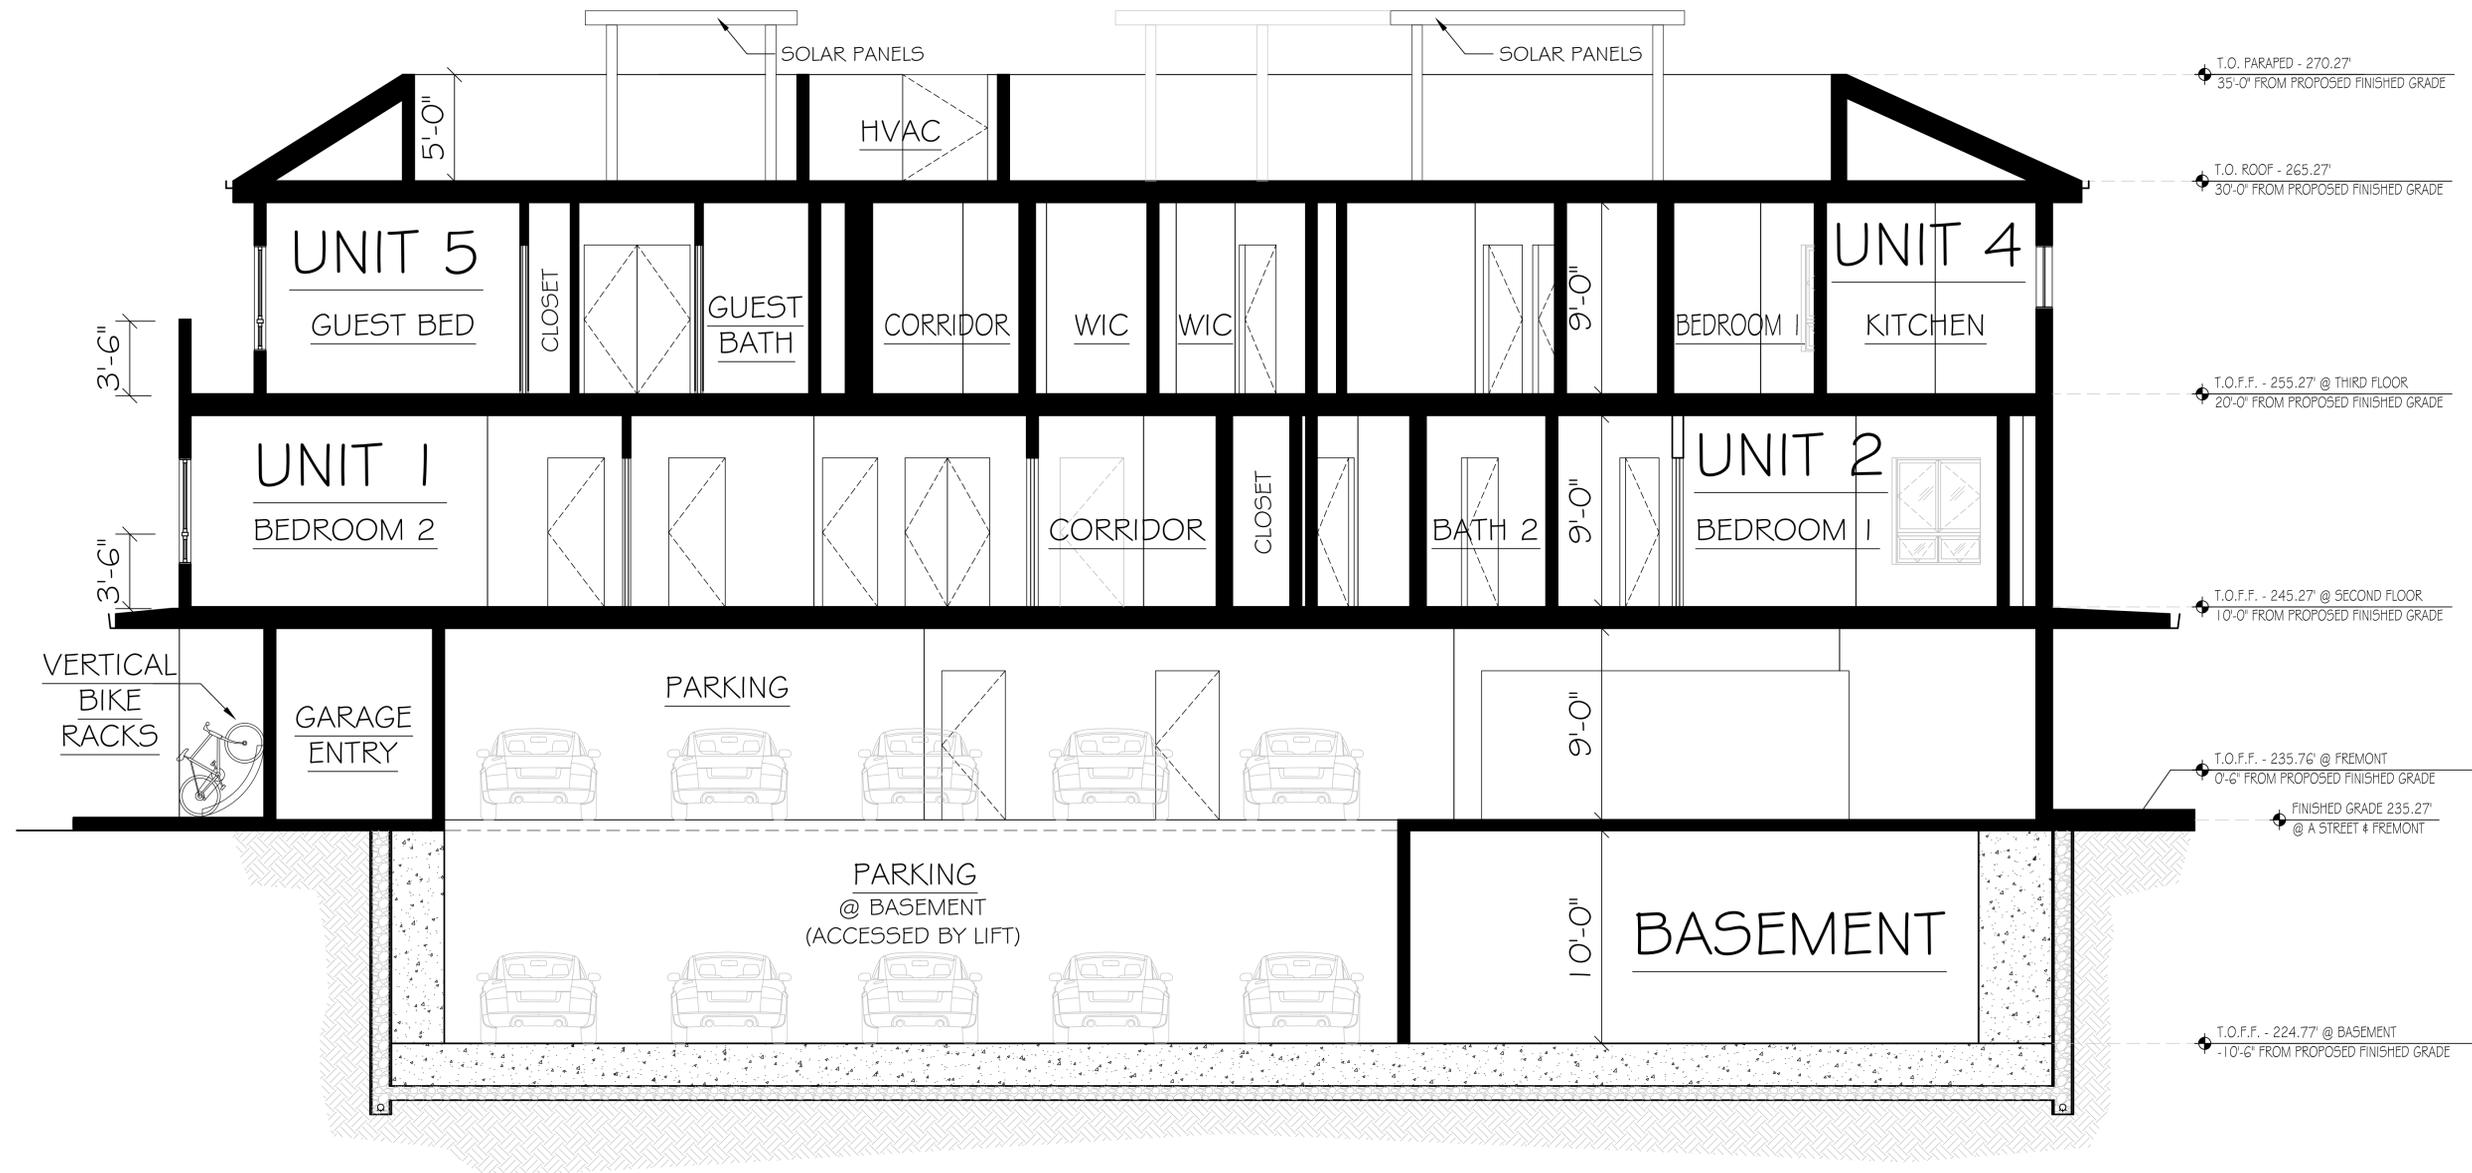

LOYOLA CORNERS
999 FREMONT AVE
LOS ALTOS, CA 94024

DESIGN DEVELOPMENT
SECTION B-B

08-21-14

A4.2

SECTION B-B



SCALE: 1/4"=1'-0"

1